

# AN5215


## TV Sound-IF Amplifier, FM Detector IC

### Overview

The AN5215 is an integrated circuit designed for TV receiver sound-IF amplifier and FM detector, and also is usable for TV sound multiplex broadcasting.

### Features

- High input sensitivity :  $V_i (lim) = 50 \mu V_{rms}$  typ.
- Usable as sound multiplex circuitry
- Good FM Detector characteristics
- 7-pin single-in-line plastic package for flexible PCB design

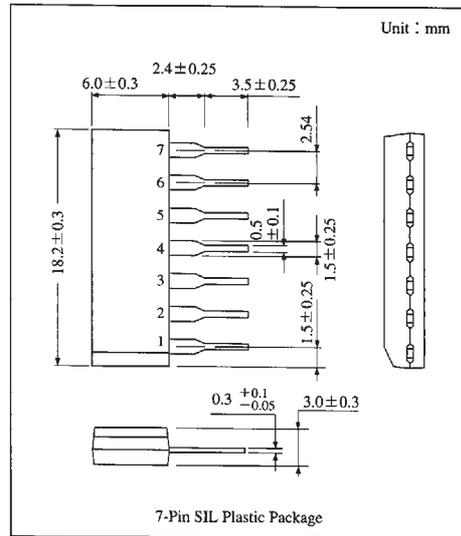


ICs for TV

### Pin Descriptions

Pin No.	Pin name
1	SIF input
2	Decoupling
3	V <sub>CC</sub>
4	GND
5	SIF output
6	Detector
7	Detector output

### Block Diagram

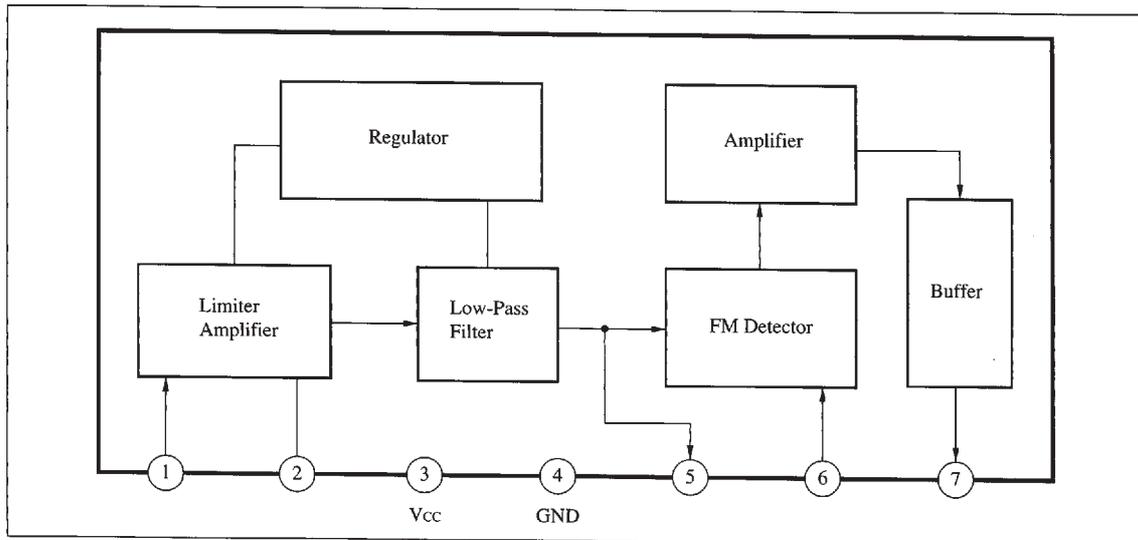

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	14.4	V
Circuit current	I <sub>CC</sub>	36	mA
Power dissipation	P <sub>D</sub>	520	mW
Temperature	Operating ambient temperature	T <sub>opr</sub>	-20 to +70
	Storage temperature	T <sub>stg</sub>	-55 to +150

■ Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Total circuit current	I <sub>tot</sub>	V <sub>CC</sub> =12V	17	23	29	mA
Input limiting voltage	V <sub>i(lim)</sub>	f <sub>0</sub> =4.5MHz, f <sub>m</sub> =400Hz, Δf=±25kHz	—	50	100	μV <sub>rms</sub>
AM rejection (1)	AMR1	f <sub>0</sub> =4.5MHz, f <sub>m</sub> =400Hz, m=30% (AM), V <sub>i</sub> =100mV <sub>rms</sub>	43	53	—	dB
AM rejection (2)	AMR2	f <sub>0</sub> =4.5MHz, f <sub>m</sub> =400Hz, m=30% (AM), V <sub>i</sub> =100μV <sub>rms</sub>	27	37	—	dB
Total detector output	V <sub>O</sub>	f <sub>0</sub> =4.5MHz, f <sub>m</sub> =400Hz, Δf=±25kHz, V <sub>i</sub> =100mV <sub>rms</sub>	385	550	715	mV <sub>rms</sub>
Total harmonics distortion	THD	f <sub>0</sub> =4.5MHz, f <sub>m</sub> =400Hz, Δf=±25kHz, V <sub>i</sub> =100mV <sub>rms</sub>	—	0.3	1.0	%
Input resistance	R <sub>i(IF)</sub>	f=4.5MHz, V <sub>i</sub> =30mV	6	15	100	kΩ
Input capacitance	C <sub>i(IF)</sub>	f=4.5MHz, V <sub>i</sub> =30mV	3	6	9	pF

■ Application Circuit

