

HALOSTAR STARLITE

50 W 12 V GY6.35



Product benefits

- Brilliant accent light
- Incredibly small dimensions for revolutionary new luminaire designs
- Approved for use in open luminaires (to IEC 60598-1)
- Axial filament for optimum directional light
- Special pins for corrosion protection
- UV filter
- Contains no mercury, can be thrown away with normal household waste

Product features

- Average life: 4,000 h
- 100 % dimmable
- Base: G4, GY6.35
- Color rendering index R_a : 100



Technical data

Electrical data

Rated wattage	50 W
Nominal wattage	50 W
Rated number of switching cycles	1000000 ¹⁾
Rated power factor λ	1.00

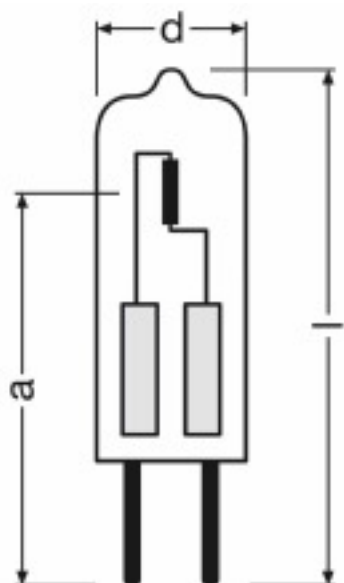
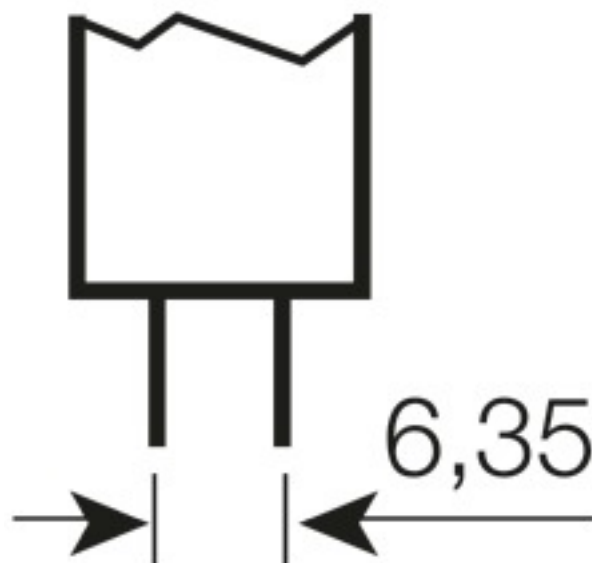
¹⁾ At 1 s on / 1 s off

Light technical data

Nominal luminous flux	900 lm
Rated luminous flux	900 lm
Rated color temperature	3000 K
Rated color rendering index Ra	100
Rated starting time	0.0 s
Rated warm-up time (60 %)	0 s
Lumen main.fact.at end of nom.life time	0.80

Dimensions & weight

Length	44.0 mm
Overall length	44.0 mm
Diameter	12.0 mm
Light center length (LCL)	30.0 mm
Outer bulb	T12

*Product line drawing with letters**Base*

Colors & materials

Rated lamp mercury content	0.0 mg
Mercury-free	Yes

Lifespan

Nominal lamp life time	4000 h
Rated lamp life time	4000 h

Additional product data

Base (standard designation)	GY6.35
Filament setting	Axial

Capabilities

Dimmable	Yes
----------	-----

Capabilities

Burning position	hs30
------------------	------

Country specific categorizations

ILCOS	HSGST/C/UB-50-12-GY6,35-12/30
-------	-------------------------------

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300328201	Folding carton box 1	25 mm x 23 mm x 70 mm	5.00 g	0.04 dm ³
4050300942193	Shipping carton box 40	121 mm x 126 mm x 126 mm	208.00 g	1.92 dm ³

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.