


6.0×3.5 Horizontal Push Tact Switch



Features

- Reflow solderable.
- Packaged with a 16mm wide embossed taping.
- Sharp "click" feel with a positive tactile feedback.

How to order

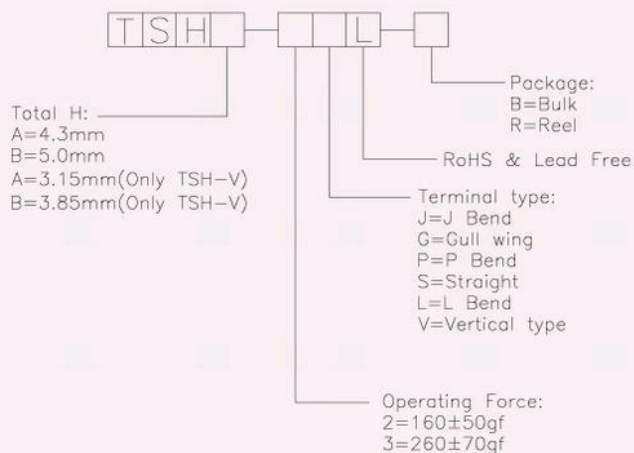

Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communication apparatus, measuring instruments, TV sets, VCRs, etc.

Specification

Items		Standard
Operating temperature range		-20°C to +70°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	30,000 Cycles, 50,000 Cycles
Mechanical performance	Operating force	2:160 ± 50gf, 3:260 ± 70gf
	Travel	0.25 ± 0.1mm

Diagram

	TSH-J	TSH-G	TSH-P
Dimensions			
Circuit Diagram			
Pad Layout			