

## Micro USB Connectors



### KLS1-238 Micro USB Connector With B Type Female SMT

#### Material:

Housing: High temperature thermoplastic with g.f, UL94V-0  
Contact: copper alloy,  $t=0.20\text{mm}$   
Shell: copper ally,  $t=0.25\text{mm}$

#### Specification:

Current rating: 1 A Max.  
Dielectric withstanding voltage: 100V(ac) for 1 min.  
Contact resistance: 50mW Max.  
Total unmating force: 1.0 kgf Min. 0.81~2.05 kgf. after 10000 insertion/extraction cycles  
Temperature rating:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$

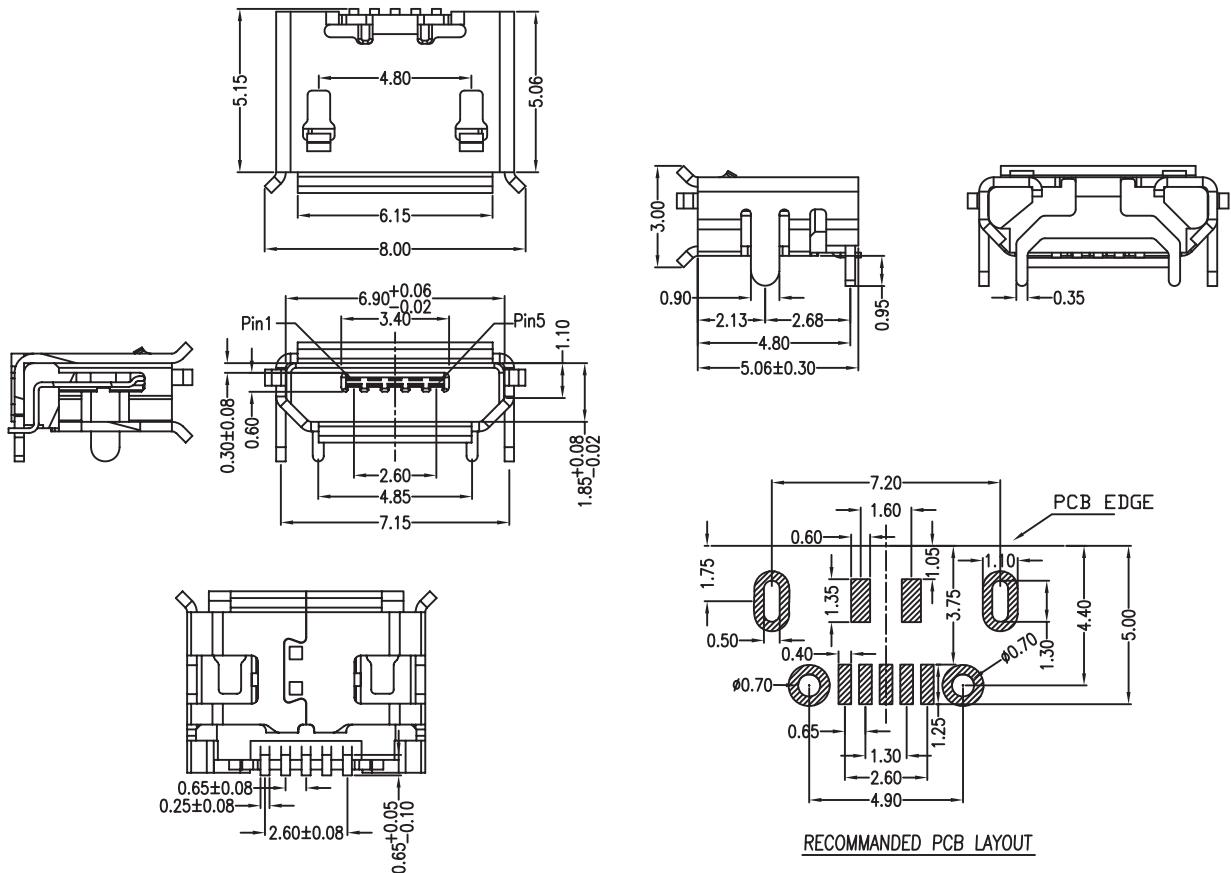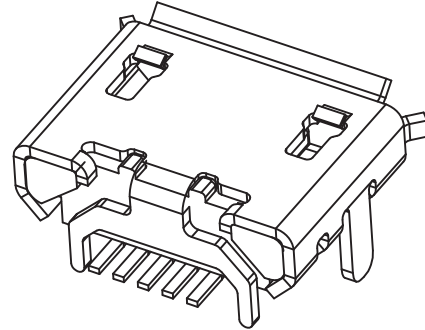

## ORDER INFORMATION

Product NO.: KLS1-238 - 0 - 0 - 0 - R

Pos. NO. \_\_\_\_\_ T-Tube packing P-Blister tray packing R-Reel packing  
Micro USB Connector With B Type Female SMT \_\_\_\_\_  
0-Without Post 1-With Post \_\_\_\_\_ 0-Without Mylar 1-With Mylar  
0-Gold plated 1-Matte Tin plated