

A Powerful Speedy Charger for Everybody

Fully charge VTC5 in 1.25hrs with 2A charge current.





Great Compatibility

Apply to 3.6V/3.7V rechargeable
18650/18700/20700/21700/22650/25500
26650 Li-ion batteries.

0V Activation Function

Most batteries we discarded are over-discharged batteries, and 0V Activation Function brings them back to life. Originally invented by XTAR, we are still leading the technology.






Easy-to-read Display

Battery power and charging status are clearly showed.

Charge Everywhere

Micro-USB Charging Port compatible with all 5V USB power includes USB wall adapters, solar panel USB, power banks, etc.

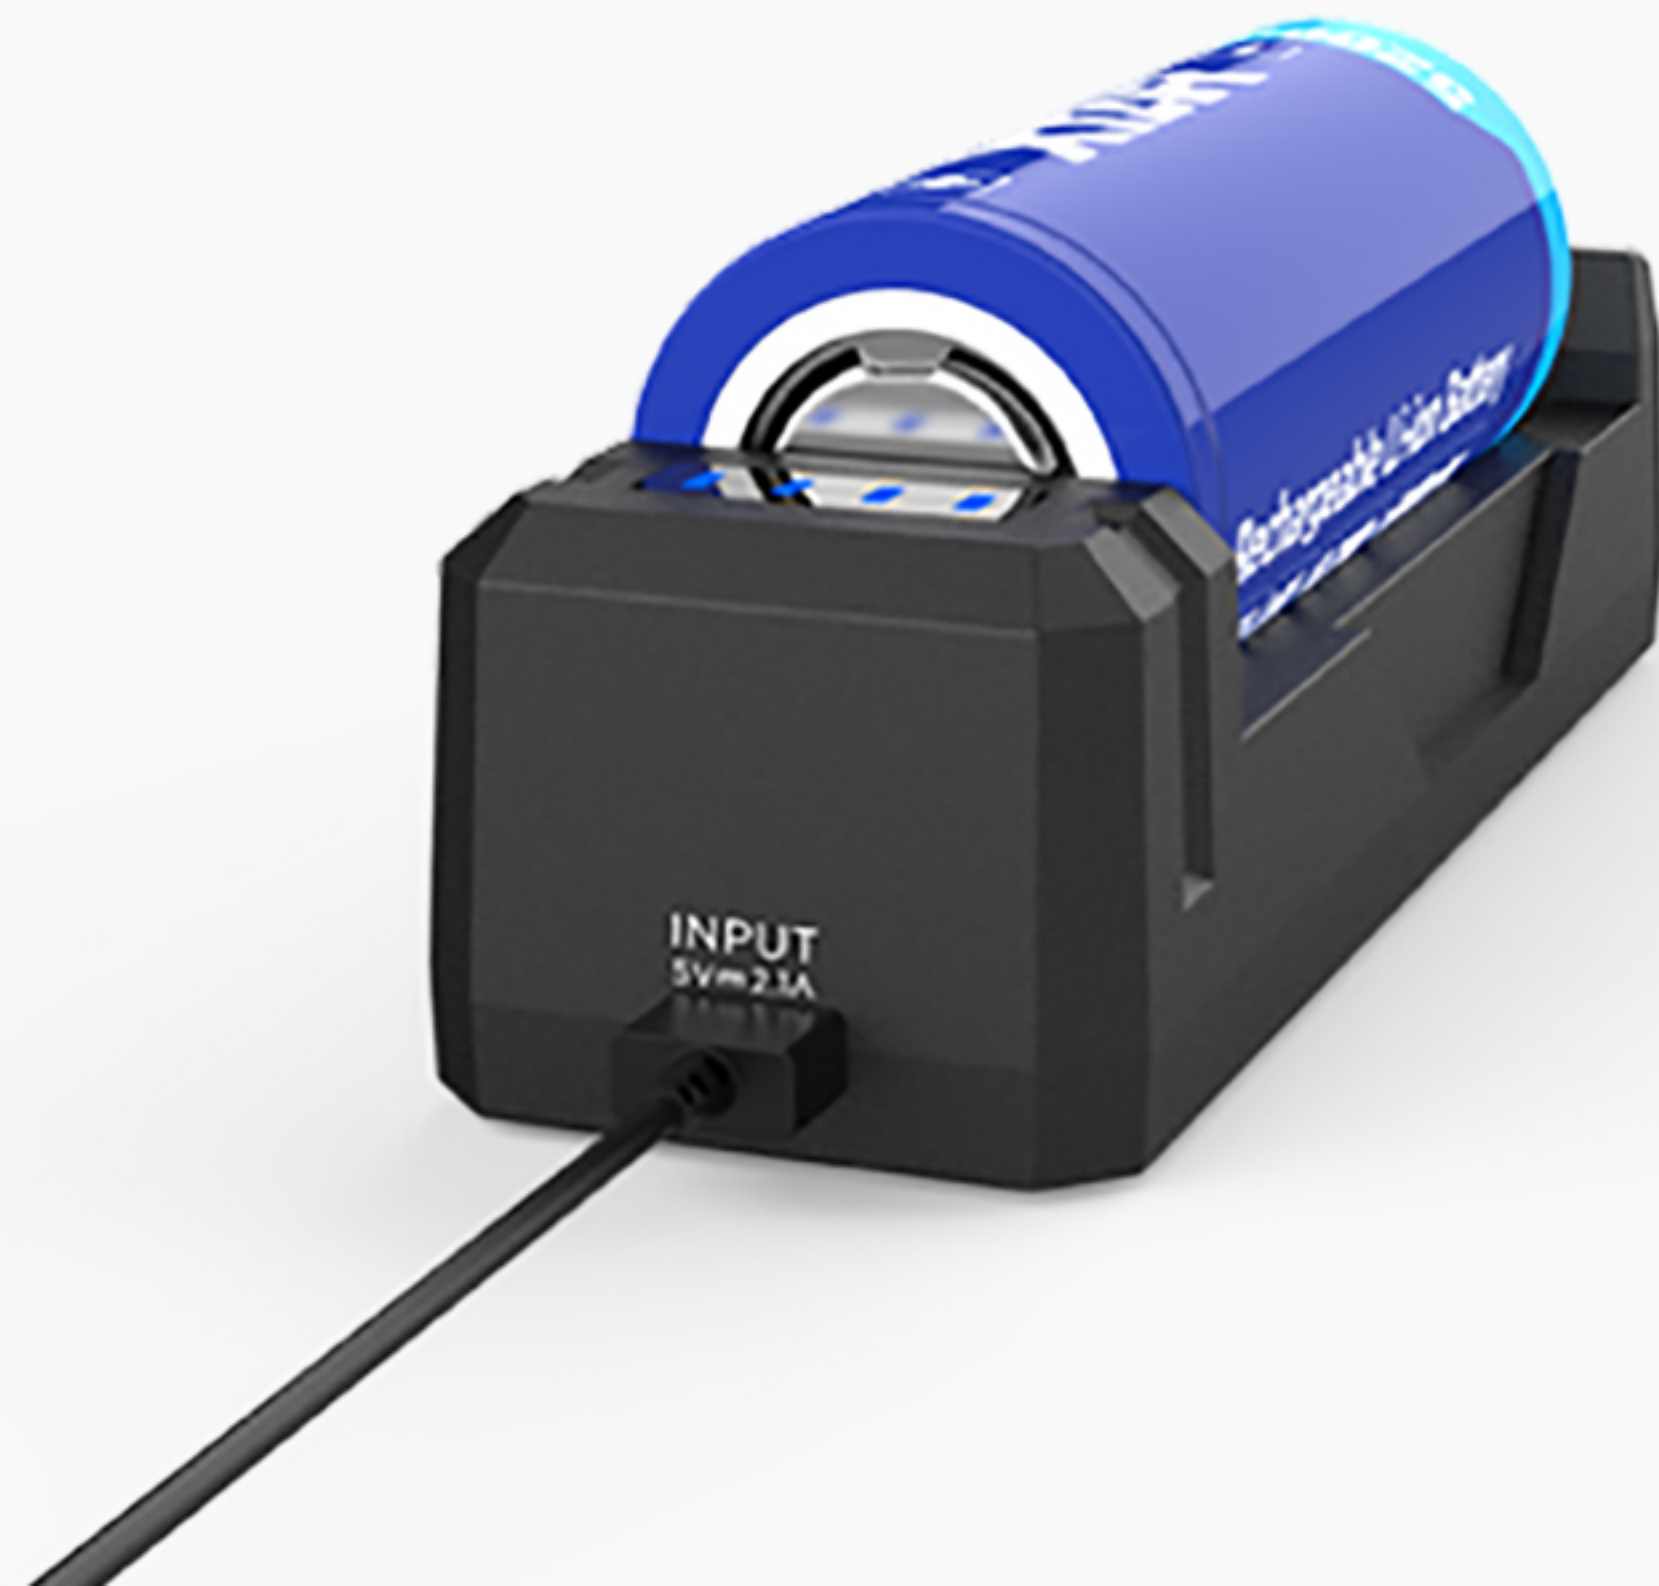



Compatible with Any Adaptors

Manage charging current according to the power supply automatically.

*Recommend 5V/2.1A power source or above to maximize efficiency.

Quality Guarantee

Safe, Durable and Peace of Mind

RoHS **FC** **CE**



short circuit
protection



Reverse polarity
protection



Temperature
monitoring



CPIC Product
Insurance



Flame
retardant
material



1 year
warranty




Safe input
voltage



overheated
protection

Battery Life Optimization Charging

Accurate cut-off, efficient charging and never overcharge batteries

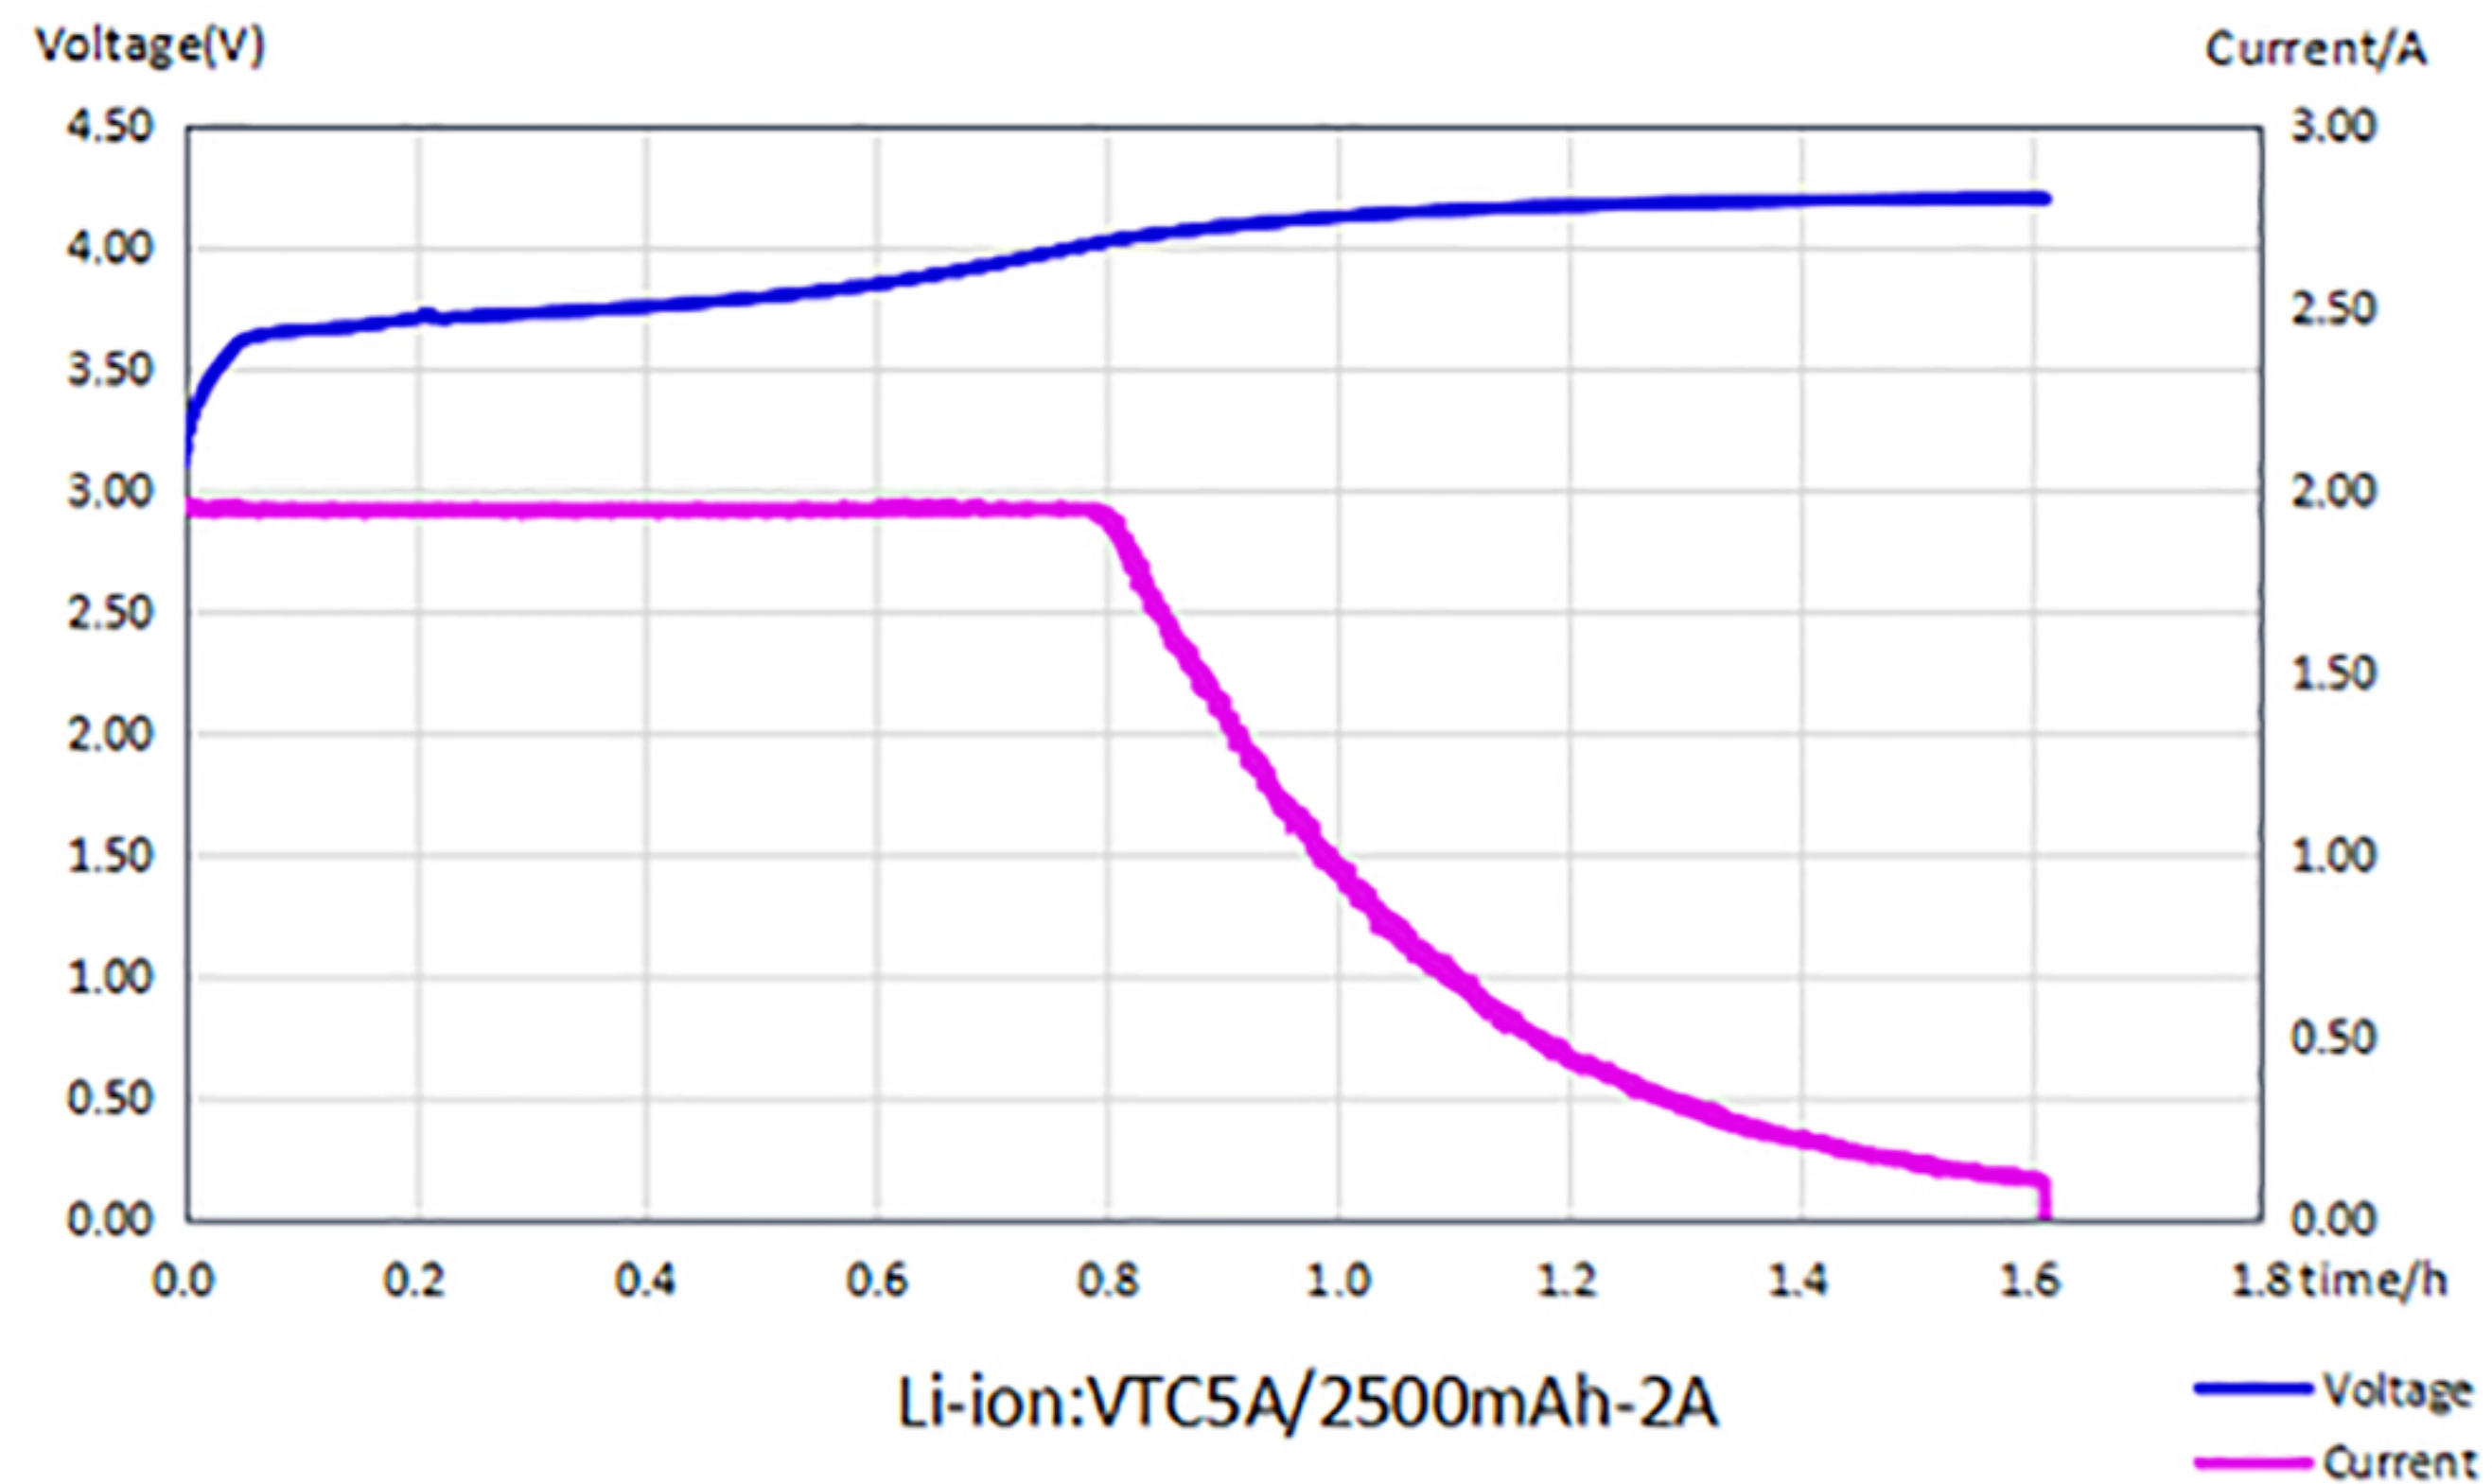

SC1 Specification

Model	SC1
Input	DC 5V 2.1A
Constant Current	2AX1
End of Charge Voltage	$4.20 \pm 0.05V$
End of Charge Current	$\leq 120mA$
Operating Temperature	0-40°C
Size	L35mm x W105mm x H39mm
Net Weight	37g

Package Contents



English Version
SC1 battery charger, USB cable, Manual



Multi-language Version
SC1 battery charger, USB cable, Manual