

**AN6651**


## Motor Control Circuit

## ■ Description


The AN6651 is a monolithic integrated circuit designed for the rotating speed control of a compact DC motor which is used for a tape recorder, record player, etc.

## ■ Features

- Small four-lead plastic package for compact motor
  - Fewer external parts
  - Stable low reference voltage (1.0V typ.), wide motor speed setting
  - Highly stable operation over a wide range of supply voltage and torque supply voltage,  $V_{CC} = 3.5V \sim 14.4V$
  - Reverse voltage protection circuit
  - Good torque characteristics

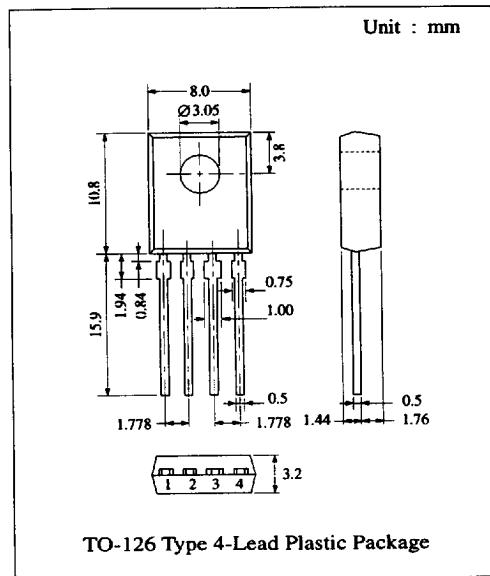

## ■ Block Diagram

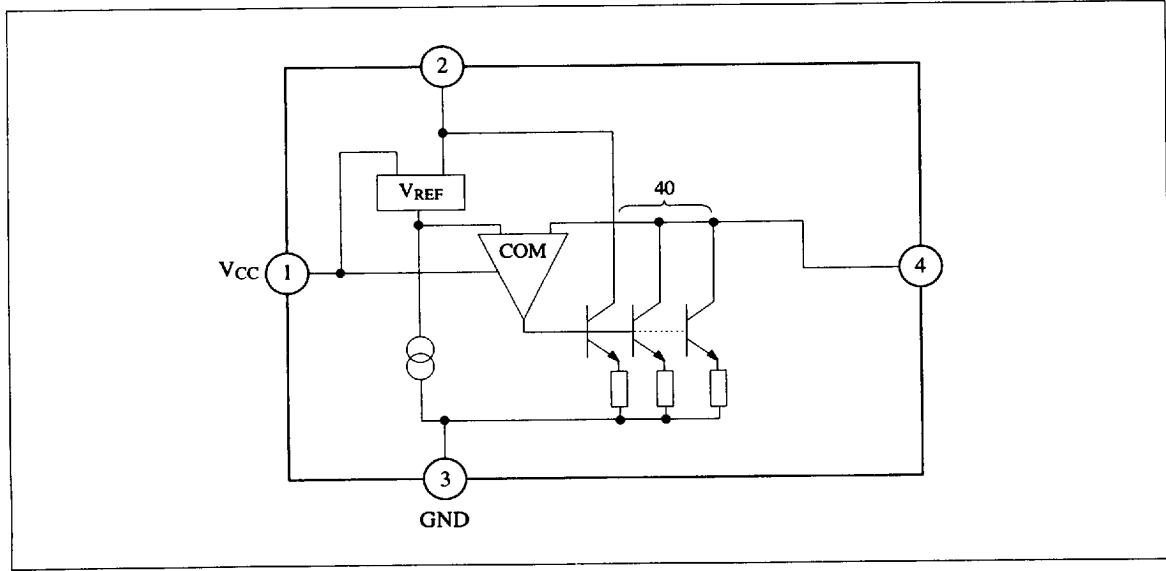

■ 6932852 0013674 T50 ■

Panasonic

## ■ Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Rating	Unit
Supply Voltage	V <sub>CC</sub>	14.4	V
Supply Current	I <sub>CC</sub> <sup>*2</sup>	2000	mA
Power Dissipation	P <sub>D</sub> <sup>*1</sup>	1300	mW
Operating Ambient Temperature	T <sub>OPR</sub>	-20 ~ +75	°C
Storage Temperature	T <sub>STG</sub>	-40 ~ +150	°C

\*1) Ta = 25°C, with a 10mm x 10mm bakelite printed circuit board (35μm Cu leaf)      \*2) t ≤ 5s

Operating Supply Voltage Range: V<sub>CC</sub> = 3.5V ~ 14.4V


## ■ Electrical Characteristics (Ta=25°C)

Item	Symbol	Test Circuit	Condition	min.	typ.	max.	Unit
Reference Voltage	V <sub>REF</sub>	1	V <sub>CC</sub> = 6V, R <sub>a</sub> = 1kΩ	0.85	1.0	1.15	V
Bias Current	I <sub>Bias</sub>	3	V <sub>CC</sub> = 6V		0.8	1.8	mA
Current Proportional Constant	K	2	V <sub>CC</sub> = 6V, ΔI <sub>4</sub> = 40mA	35	40	45	
Saturation Voltage	V <sub>sat</sub>	1	V <sub>CC</sub> = 4.2V, R <sub>a</sub> = 5.0Ω		1.5	2	V
Voltage Characteristics (1)	$\frac{\Delta V_{REF}}{V_{REF}} / V_{CC}$	1	V <sub>CC</sub> = 3.5 ~ 14V, R <sub>a</sub> = 1kΩ		-0.1		%/V
Voltage Characteristics (2)	$\frac{\Delta K}{K} / V_{CC}$	2	V <sub>CC</sub> = 3.5 ~ 14V, ΔI <sub>4</sub> = 40mA		0.2		%/V
Current Characteristics (1)	$\frac{\Delta V_{REF}}{V_{REF}} / I_4$	1	I <sub>4</sub> = 50mA ~ 200mA		-0.02		%/mA
Current Characteristics (2)	$\frac{\Delta K}{K} / I_4$	2	I <sub>4</sub> = 50mA ~ 200mA		-0.01		%/mA
Temperature Characteristics (1)	$\frac{\Delta V_{REF}}{V_{REF}} / T_a$	1	T <sub>a</sub> = -20°C ~ 75°C, V <sub>CC</sub> = 6V, R <sub>a</sub> = 1kΩ		0.01		%/°C
Temperature Characteristics (2)	$\frac{\Delta K}{K} / T_a$	2	T <sub>a</sub> = -20°C ~ 75°C, ΔI <sub>4</sub> = 40mA		0.01		%/°C


## ■ Pin

Pin No	Pin Name
1	V <sub>CC</sub>
2	Control Pin
3	GND
4	Motor Pin


Test Circuit 1 ( $V_{REF}$ ,  $V_{sat}$ ,  $\frac{\Delta V_{REF}}{V_{REF}}$ ,  $\frac{\Delta V_{REF}}{I_4}$ ,  $\frac{\Delta V_{REF}}{T_a}$ )

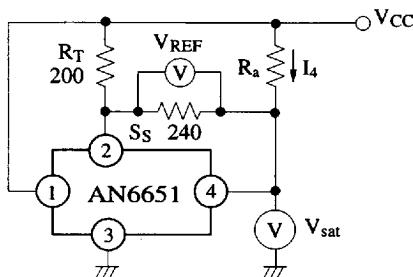


Test Circuit 2 ( $K$ ,  $\frac{\Delta K}{K}$ ,  $\frac{\Delta K}{I_4}$ ,  $\frac{\Delta K}{T_a}$ )

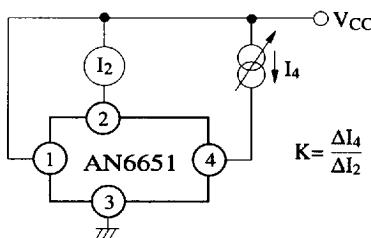

Test Circuit 3 (I<sub>Bias</sub>)

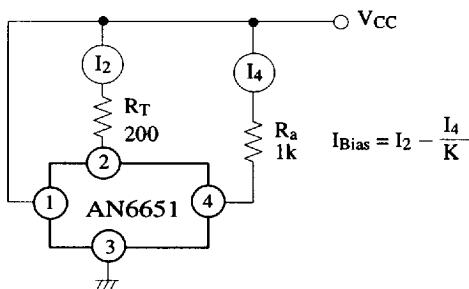

## ■ Application Circuit

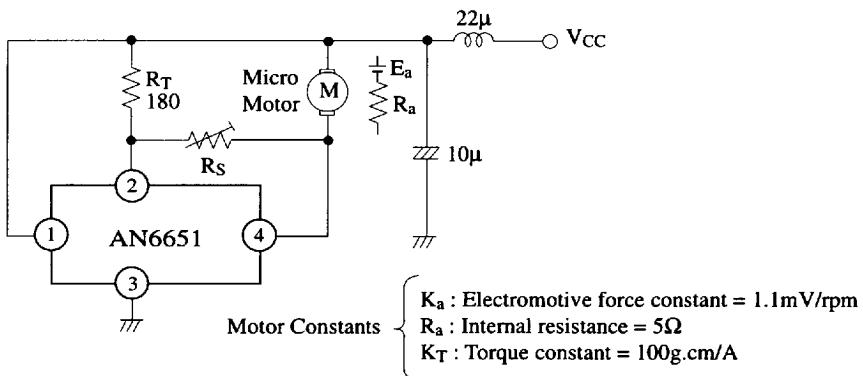

■ 6932852 0013676 823 ■

Panasonic

## ■ Characteristics Curve

