


**MKT**

**Radial Multilayer Ceramic Capacitors**

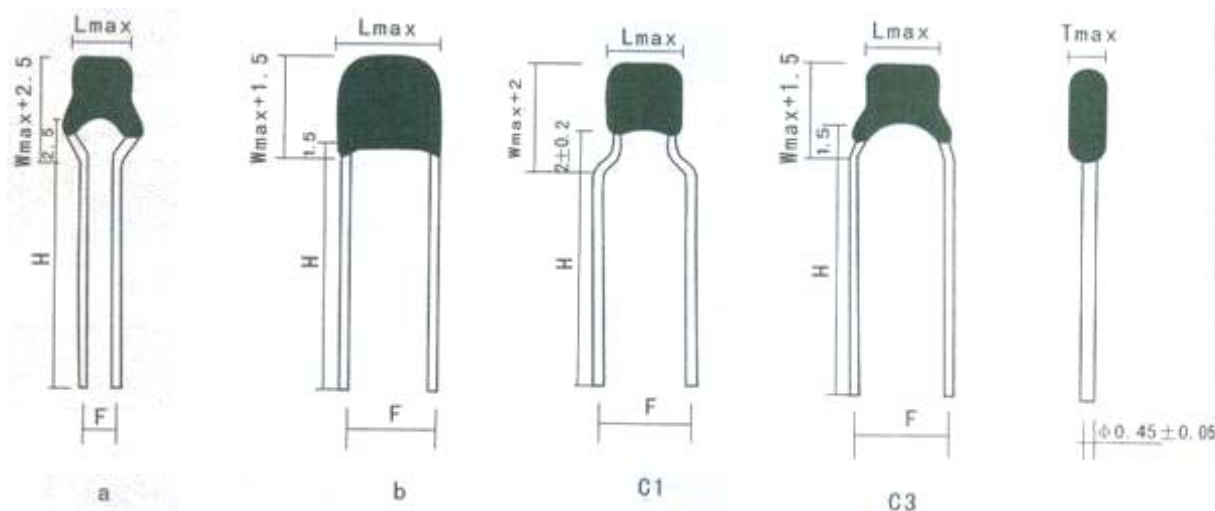


Size Code	Shape	Dimensions (mm)					voltage	Capacitance(pF)		
		F (±0.5)	Hmin (±1)	Lmax	Wmax	Tmax		COG(NPO)	X7R	Y5V (Z5U)
<b>0805</b>	a	2.54	5.0				25V 50V 100V	0R5~332 0R5~222 0R5~102	331~104 331~104 331~104	103~105 103~684
	b	2.54	10.0							
	C1	5.08	5.0/10.0	4.2	3.8	3.8				
	C2	5.08	5.0							
	C3	5.08	5.0/10.0							
<b>1206</b>	a	2.54					25V 50V 100V	0R5~682 0R5~472 0R5~392	102~224 102~104 102~105	103~125 103~105
	b	3.50	10.0	5.0	4.5	3.8				
	C1	5.08								
<b>1210</b>	b	3.50	10.0				25V 50V 100V	0R5~103 0R5~472 0R5~392	102~334 102~224 102~105	104~155
	C1	5.08		7.6	5.5	3.8				
<b>1812</b>	b	4.57	10.0	8.5	8.5	3.8	25V 50V 100V	561~103 561~682 561~472	103~474 103~334 103~105	154~335
<b>2225</b>	b	5.50	10.0	10.5	9.5	4.2	25V 50V 100V	102~223 102~223 102~103	103~105 103~105 103~474	684~475
<b>3035</b>	b	7.50	10.0	12.5	10.5	4.2	25V 50V 100V	102~104 102~473 102~333	103~225 103~205 103~105	105~106 105~685

\*Lead spacing determined by customer requirements.

**MKT**



**Radial Multilayer Ceramic Capacitors**

■Radial Leads MLCC Packaging Style

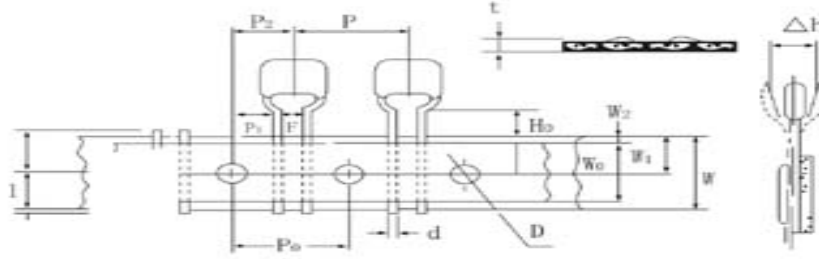

DESCRIPTION	SYMBOL	DIMENSIONS(mm)	REMARKS
PITCH OF COMPONENT	P	12.7±1.0	
FEEDHOLD PITCH	PO	12.7±0.3	CUMULATIVE PITCH ERROR: ±1.0mm/20 PITCHES
FEED HOLD CENTER TO LEAD	P1	3.85±0.7	FOR F:5.08, 5.1±0.7 FOR F:2.54
FEED HOLD CENTER TO COMPONENT CENTER	P2	8.35±1.3	
LEAD TO LEAD SPACING	F	5.08+0.8/-0.2 OR 2.5+0.8/-0.2	TO LEAD TIP WITHIN TOL
COMPONENT ALIGNMENT, F-R	△H	2.0max	THE ALIGNMENT FORM THE CENTER OF THE LEAD IS ±1.0mm
TAPE WIDTH	W	18.0±1	
ADHESIVE TAPE WIDTH	W0	12.0±1	
HOLE POSITION	W1	9.0±0.5	
ADHESIVE TAPE POSITION	W2	3.0max	ADHESIVE TAPE MUST NOT PROTRUDE FROM BADE PAPER
LEAD-WIRE CLINCH HEIGHT	H0	15-20±0.5	6.5<=H0-W1
COMPONENT HEIGHT	H1	32.25max	
FEED HOLE DIAMETER	D0	4.0±0.3	
TOTAL TAPE THICKNESS	T	0.7±0.2	

■ Ammo Packaging

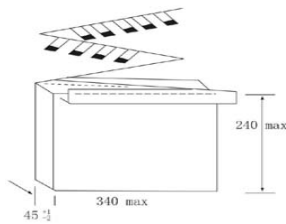

# MKT

## Radial Multilayer Ceramic Capacitors

### ■How To Order Of Radial Leads MLCC :

MKT	---	0805	Y	104	M	500	PF3	R
↓		↓	↓	↓	↓	↓	↓	↓
<b>A</b>		<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>

<b>A:</b>
<b>Product Type</b>

<b>D:</b>
<b>Capacitance</b>
First two digits are significant third digit is number of zeros. For Example: 104=100000pF 5R6=5.6pF

<b>F:</b>
<b>Rated Voltage</b>
The code meaning is same as capacitance. For Example: 250=25V 500=50V 101=100V

<b>B:</b>	
<b>Unit : Inches</b>	
<b>Cmos Chip Size (LxW)</b>	
<b>Code</b>	<b>Chip</b>
0805	0.08x0.05
1206	0.12x0.06
1210	0.12x0.10
1812	0.18x0.12
2225	0.22x0.25
3035	0.30x0.35

<b>E:</b>	
<b>Tolerance</b>	
<b>B</b>	±0.10pF
<b>C</b>	±0.25pF
<b>D</b>	±0.5pF
<b>F</b>	±1.0%
<b>G</b>	±2.0%
<b>J</b>	±5.0%
<b>K</b>	±10%
<b>M</b>	±20%
<b>N</b>	±30%
<b>S</b>	+50% -20%
<b>Z</b>	+80% -20%
<b>P</b>	+100% -0%
B.C.D for C<10pF NPO: B.C.D.F.G.J.K.M. X7R: K.M.S.Z. Y5V/Z5U: M.S.Z.P.	

<b>G:</b>		
<b>Packaging Style</b>		
<b>Ammo</b>	PF1	2.54mm
	PF3	5.08mm
<b>Bulk</b>	F1	2.54mm
	F2	4.57mm
	F3	5.08mm
	F4	7.50mm
	F5	3.50mm

<b>C:</b>	
<b>Dielectric</b>	
<b>N</b>	COG (NPO)
<b>B</b>	X7R
<b>Y</b>	Y5V
<b>E</b>	Z5U

<b>H:</b>	
<b>Pb</b>	
<b>R</b>	RoHS