


SPECIFICATIONS	
<b>Nominal Voltage</b>	1.5 V
<b>Rated Capacity</b>	50 mAh on 6.8 kΩ to 1.2V
<b>Average Weight</b>	1.09 g (0.038 oz)
<b>Terminals</b>	Flat
<b>Operating temperature range</b>	-20°C to 54°C (-4°F to 130°F)
<b>NEDA/ANSI:</b>	1168A
<b>IEC:</b>	LR54
<b>Other:</b>	LR1131

15K Ohm Cont. to 1.2V Capacity

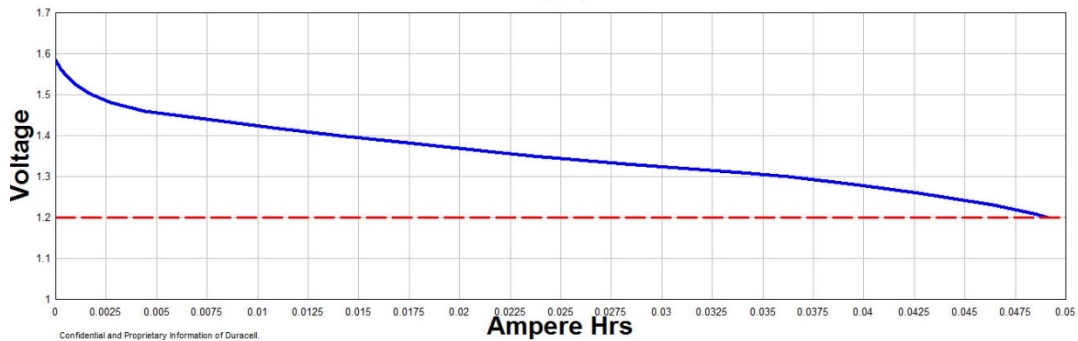

# DURACELL®

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.