

300V 12A 2.5mm<sup>2</sup>

Poles: 2P/3P/4P/5P/6P/7P


8P/9P/10P/11P/12P/

13P/14P/15P/16P/17P

18P/19P/20P/21P/22P

23P/24P

Pitch: 5.0mm 5.08mm




## Materials

Housing: Polyamide 6.6, Green



Clamp: Phosphor Bronze, 0.4t, Nickel Plated.

Wire Cage: Steel, 0.7t, Zinc Plated.

Screw: M2.5, Steel, Zinc Plated.

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO., LTD.		图名/Title	文件编号/File No.	X. ±0.2	X. ±0.2
		XY2500F-A XY2500F-B 产品图		.X ±0.1	.X ±0.1
				.XX ±0.05	.XX ±0.05
				.XXX ±0.01	.XXX ±0.01
				备注/Remark	

序号/Revno.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

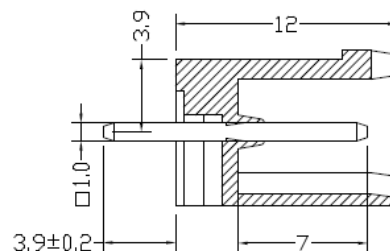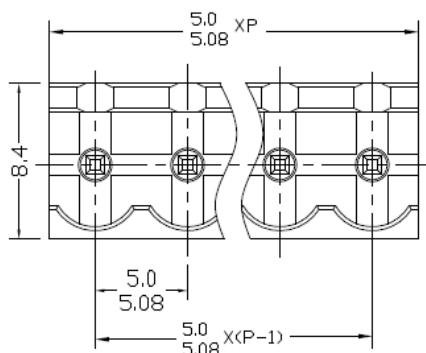

300V 12A

Poles: 2P/3P/4P/5P/6P/7P

8P/9P/10P/11P/12P/

13P/14P/15P/16P/17P

18P/19P/20P/21P/22P

23P/24P


Pitch: 5.0mm 5.08mm

Pin Dimension: 1.0X1.0mm

## Materials

Housing: Polyamide 6.6, Green

Solder Pin: Brass, 1.0t, Tin Plated.

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO., LTD.		图名/Title	文件编号/File no.	X. ±0.2	X. ±0.2
		XY2500V-A XY2500V-C 产品图		.X ±0.1	.X ±0.1
				.XX ±0.05	.XX ±0.05
				.XXX ±0.01	.XXX ±0.01
				备注/Remark	

序号/Revno.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------