
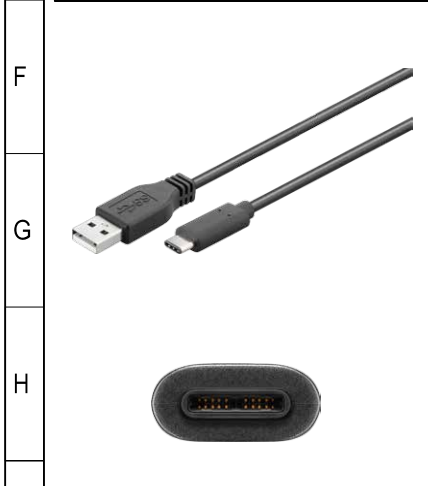


USB-C	Isolation/Insulation	USB-A
VBUS	rot/red	1
A7	weiß/white	2
A6	grün/green	3
GND	schwarz/black	4
Shell	Geflecht/braid	Shell



Nr. / No.	Kabellänge / Cable length (m)	Farbe / Colour	Verpackung / Packaging
38675	0.1		PL
38677	0.1		PL
59118	0.5		PL
59126	0.5		PL
45735	1.0		PL
45677	1.0		BOX
45563	1.0		PL
45680	1.0		BOX
59122	2.0		PL
59130	2.0		PL
59124	3.0		PL
59132	3.0		PL

USB 2.0 Kabel > USB 3.1 (Typ C)  
 passend für Apple MacBooks  
 MacBook MF865D/A, MK4N2D/A, MK4M2D/A,  
 MJY32D/A, MF855D/A, MJY42D/A

- Anschlüsse: USB 3.1 (Typ C) Stecker,  
 USB 2.0 (Typ A) Stecker

- Datenrate: USB 2.0; max. 480 Mbit/s

- Innenleiter: 7/0.12 TC (28AWG),  
 7/0.08 TC (32AWG)

- Isolierung: HDPE/PVC

- für Schnelllademodus bis 3 A Ladestrom geeignet

- RoHS-konform

USB 2.0 cable > USB 3.1 (Type C)  
 suitable for Apple MacBooks  
 MacBook MF865D/A, MK4N2D/A, MK4M2D/A,  
 MJY32D/A, MF855D/A, MJY42D/A

- Connectors: USB 3.1 (Type C) plug,  
 USB 2.0 (Type A) plug


- Data transfer rate: USB 2.0; max. 480 Mbit/s

- Inner conductor: 7/0.12 TC (28AWG),  
 7/0.08 TC (32AWG)

- Insulation: HDPE/PVC

- suitable for fast charge mode up to 3 A

- RoHS compliant

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	tf	DAT USB 3.1 C/A 2.0	
	tf	gepr.:	tf		
		Norm.:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change					