
GP Batteries

Product Specification

Model No.: GPPB320

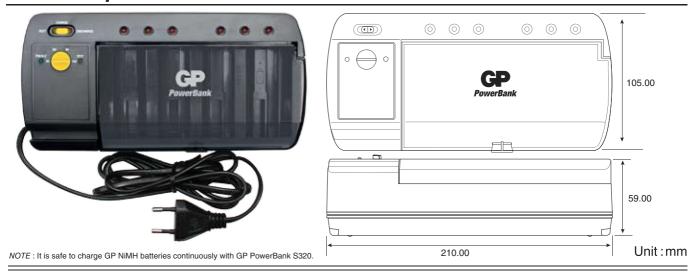

Product Name : GP PowerBank S320

Description : Universal battery charger

Input Voltage : 230V / 50Hz 8.5W

Output Voltage : AA / AAA / C / D 4 x 1.2V DC

9V 2 x 9V DC

Application : For charging 1 to 4 pcs AA, AAA, C or D size battery and 1 to 2 pcs 9V size battery.

Battery Tester Function for AA, AAA, C or D size battery.

Discharge Function for AA, AAA, C or D size battery.

Preset Timer Function

Charging Current

AA	AAA	С	D	9V
270mA	270mA	270mA	270mA	13mA

Trickle Charging Current : 50mA

Discharging Current : 170mA

Charging Time

	Size	QTY (pcs.)	Battery (mAh / series)	Charging Time (hrs)
	AA	1 to 4	2100 ~ 2700	9 - 15
		1 to 4	1300 ~ 1800	6 - 9
GP	AAA	1 to 4	600 ~ 1000	3 - 6
	С	1 to 4	2200 ~ 3500	9 - 15
	D	1 to 4	2200 ~ 4500	9 - 15
	9V	1 to 2	170	15



Product Specification

Model No.: GPPB320

MTBF : 30000 hours

Operating Temperature : 0°C to 40°C

Storage Temperature : -20°C to 50°C

Charge Indicator : 4 x LED for four channels, 2 x LED for 9V

1 x bulb for battery testing

1 x LED for trickle charging

LED Indications : Battery charging

Condition	Indication	
Stand by	• LED off	
Charging in progress	• Red LED on	
When charging is finished and switch to trickle charge	• "TRICKLE" Green LED on	

Battery testing

Indicator	Remarks	
Orange bulb on	No need for recharging	
Orange bulb off	Please recharge	

Battery discharging

Condition	Indication	
Discharging in progress	• LED off	

Dimensions : 210(L) X 105(W) X 59(H)mm

Weight : 630g Safety Approvals : GS, CE

Compliance : RoHS, REACH

Warranty Period : 12 months from ex-factory date