

Specifications:

Contact Resistance: 15mΩ max

Insulator Resistance: 1000MΩ min




Dielectric Strength: AC 1500V For 1 minute Rated

Current : 5AMP

Material:

Housing: Nylon UL94V-2

Contact: Brass(Tin Plated)

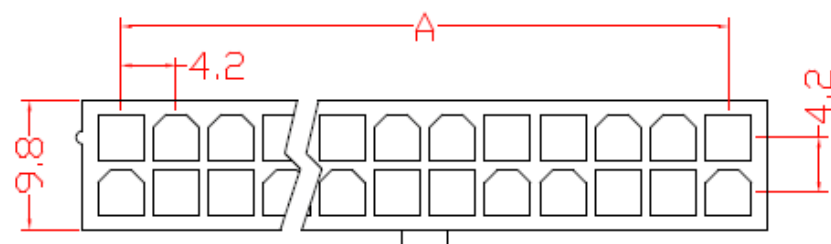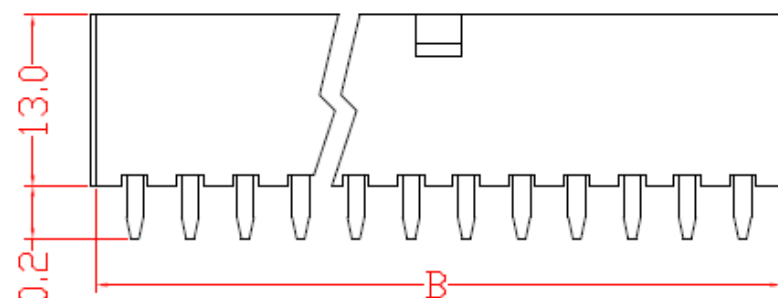

Position	A	B
2	4.2	5.6
3	8.4	14.0
4	4.2	9.8
5	16.8	22.4
6	8.4	14.0
8	12.6	18.2
10	16.8	22.4
12	21.0	26.6
14	25.2	30.8
16	29.4	35.0
18	33.6	39.2
20	37.8	43.4
22	42.0	47.6
24	46.2	51.8

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x." ±2"
		图名/Title	文件编号/File No.	.x ±0.1	.x" ±1"
		140M产品图	QJ/XYT-12092	.xx ±0.05	.xx" ±0.5"
		备注/Remark	页序/Sheet	.xxx ±0.01	
			波兰	单位/Units: MM	

