
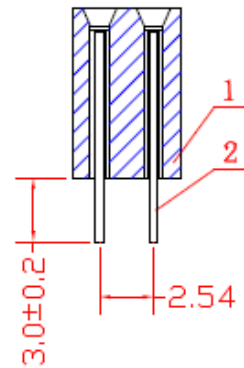
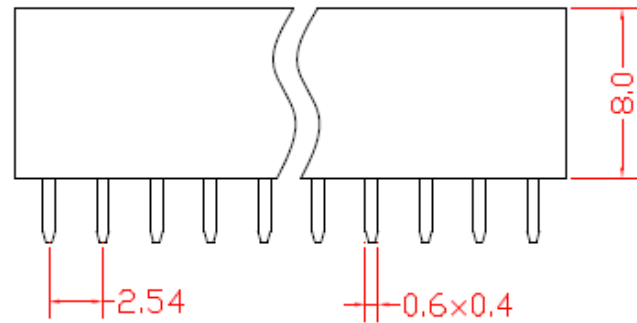


序号/RevNo.	名称/Title	文件编号/File No.
1	114双排塑料件	QJ/XYT-11125
2	114端子图(直)	QJ/XYT-11128

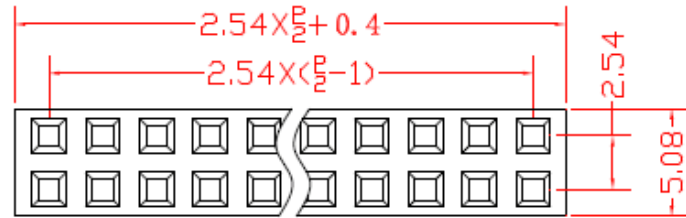

#### Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

#### Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -55°C--+105°C

Contact: Brass

Housing: PBT & 30% Glass Fiber(UL 94V-0)

#### 要求:

1. 塑料件无裂痕。
2. 整排针成一直线，相邻针之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.* ±2*
				.x ±0.1	.x* ±1*
				.xx ±0.05	.xx* ±0.5*
				.xxx ±0.01	
 <b>新亚联合科技</b> XINYA UNITED TECH GO.,LTD.		图名/Title	文件编号/File No.		
		114双排直针 产品图	QJ/XYT-12035		
		备注/Remark	页序/Sheet		
				单位/units: mm	