



序号/RevNo.	名称/Title	文件编号/File No.
1	114单排塑料件	QJ/XYT-11124
2	114端子(短弯)	QJ/XYT-11126

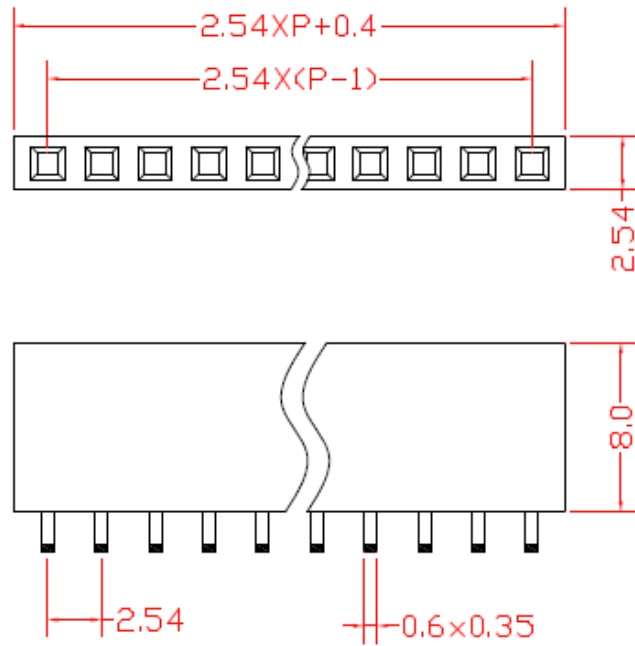

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -55°C--+105°C

Contact: Brass

Housing: PBT & 30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				X. = ±0.2	X.* = ±2*
				.X = ±0.1	.X* = ±1*
				.XX = ±0.05	.XX* = ±0.5*
				.XXX = ±0.01	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.		
		114-A单排弯针 产品图	QJ/XYT-12036		
		备注/Remark	页序/Sheet		
				单位/Units: mm	