
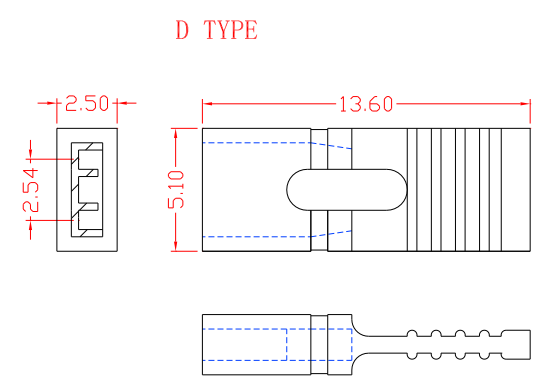


**Specifications:**  
 Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 1AMP

**Dielectric Withstanding**  
 Voltage: AC 500V For 1 minute  
 Operating Temperature:-55°C--+105°C  
 Contact: Phosphor bronze  
 Housing: PBT &30% Glass Fiber(UL 94V-0)

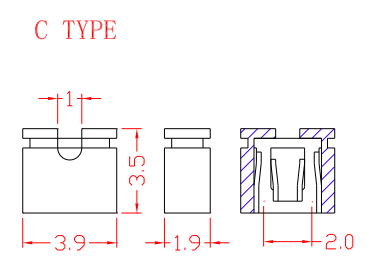

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. =0.2	x.' =2°
				.x =0.1	.x' =1°
				.xx =0.05	.xx' =0.5°
				.xxx =0.01	
 <b>新亚联合科技</b> XINYA UNITED TECH CO.,LTD.				图名/Title	文件编号/File No.
				116 产品图	QJ/XYT-12043
备注/Remark				页序/Sheet	单位/Units: mm