


Specification:

- 1) Rating: 20 A 125 VAC; 15 A 250 VAC
- 2) Contact Resistance: 35 mΩ max.
- 3) Insulation Resistance: 500 VDC 100 MΩ min.
- 4) Dielectric strength: 1500 VAC, 1 minute
- 5) Operating temperature: -30°C ~ +80°C
- 6) Electric Life: 10000 cycles

RSI2011A3BK/WH

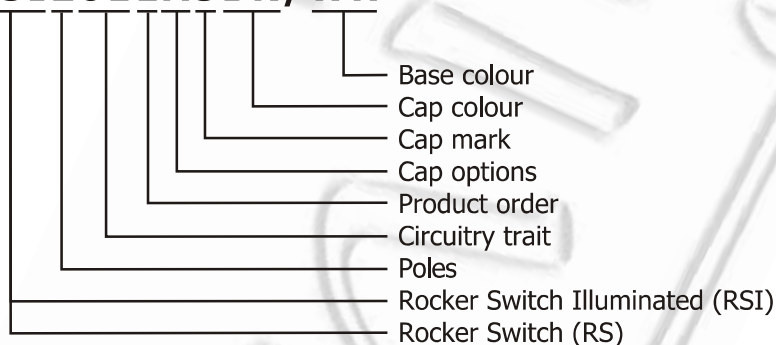

CIRCUITRY TRAIT

01	ON	-	OFF
11	(ON)	-	OFF
02	ON	-	ON
03	ON	OFF	ON
23	(ON)	OFF	(ON)

() indicates momentary

CAP COLOUR


RD	red
GN	green
OR	orange
BU	blue
WH	white
BK	black
YL	yellow

PROTECTIV CAP



RSC-09

CAP OPTIONS

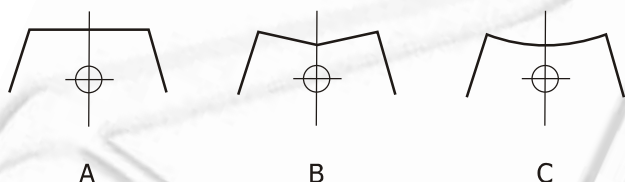

BASE COLOUR

WH white
GY gray
omitted when standard colour (black)

CAP MARKING

