


金属化聚丙烯膜交流电动机电容器

Type: **CBB60**

**Metallized Polypropylene Film
AC Motor Capacitor**

■ 外形图 Outline Drawing

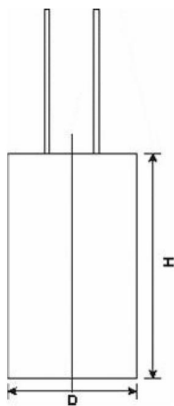

■ 特点

- 金属化聚丙烯膜卷绕，无感式结构
- 塑壳，环氧树脂灌封
- 损耗小，温度特性好，绝缘电阻高
- 自愈性好，寿命长，可靠性高
- 适用于洗衣机、分马力电机、冰箱等单相电动机的启动和运转

■ Features

- Metallized polypropylene film dielectric, non-inductive type
- PP case, epoxy resin filled,
- Loss loss, excellent temperature characteristics and high insulation resistance
- Excellent self-healing properties, long life and high reliability
- Suitable for starting and running of single-phase motors used in air-conditioners, washing-machines, divided motors and refrigerators etc.

■ 技术要求 Specifications

引用标准 Reference Standard	IEC60252-1
额定电压 Rated Voltage	450Vac
额定温度 Rated temperature	+70℃
工作温度范围 Operating Temperature Range	-40℃~+70℃
气候类型 Climate type	21
容量范围 Capacitance Range	1μF~60μF
容量偏差 Capacitance Tolerance	±5%
损耗角正切 Dissipation Factor	≤0.0100（1000Hz）
绝缘电阻 Insulation Resistance	T-T: ≥3000MΩ（20℃，1min） T-C: ≥1000 MΩ

耐电压 Voltage Proof	T-T: 1.75-2.0U _R (3s) T-C: 2000VAC (60s)
频率 Frequency	50/60 Hz

■ 安全认证 Safety Approval

认证标志 Certification Mark	引用标准 Reference Standard	范围 Ranged	证书号 Certificate No.
TUV	EN60252-1: 2011+A1	450Vac, 1 μ F ~ 60 μ F	R 50500943
C GRADE/ 3000Hours			

■ 产品尺寸 Dimensions (mm)

标称容量 Rated Capacity μ F	450Vac		引线长度 Wire Length
	Dmax (mm)	Hmax (mm)	(mm)
1	30	60	15
1.5	30	60	15
2	30	60	15
2.5	30	60	15
3	30	60	15
3.5	30	60	15
4.5	30	60	15
6	30	60	15
8	35	60	15
10	35	60	15
12	35	60	15
15	35	70	15
20	40	70	15
30	40	90	15
40	50	90	15
50	50	90	15