


Time-Current Characteristics

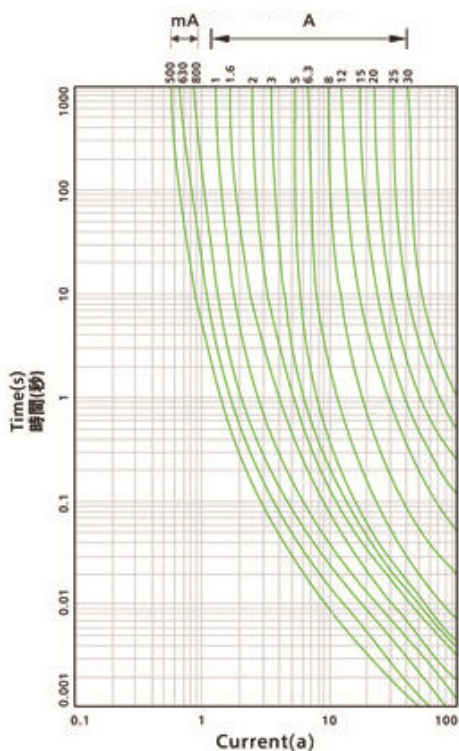

Catalog No.	Ampere Rating	Voltage Rating	I^2T Melting Integral (A ² .S)
MFC0500A/B	500mA	250V/125V	2.8
MFC0630A/B	630mA	250V/125V	3
MFC0750A/B	750mA	250V/125V	3.2
MFC0800A/B	800mA	250V/125V	3.8
MFC1100A/B	1A	250V/125V	4.1
MFC1125A/B	1.25A	250V/125V	6.4
MFC1150A/B	1.5A	250V/125V	9.2
MFC1160A/B	1.6A	250V/125V	10
MFC1200A/B	2A	250V/125V	16
MFC1250A/B	2.5A	250V/125V	20
MFC1300A/B	3A	250V/125V	24
MFC1315A/B	3.15A	250V/125V	26
MFC1350A/B	3.5A	250V/125V	32
MFC1400A/B	4A	250V/125V	36
MFC1500A/B	5A	250V/125V	55
MFC1600A/B	6A	250V/125V	85
MFC1630A/B	6.3A	250V/125V	93
MFC1800A/B	8A	250V/125V	168
MFC2100A/B	10A	250V/125V	262
MFC2120A/B	12A	250V/125V	377
MFC2150A/B	15A	250V/125V	590
MFC2200A/B	20A	250V/125V	1058
MFC2250A/B	25A	250V/125V	1674
MFC2300A/B	30A	250V/125V	2362

Approvals	Ampere Range	Certificate No.
	200mA - 10A	approving
	200mA - 10A	approving

Interrupting Rating:

10000 Amperes at 125V AC
 35 Amperes at 250V AC(500mA-1A)
 100 Amperes at 250V AC(1.25A-3.5A)
 200 Amperes at 250V AC(4A-10A)
 750 Amperes at 250V AC(12A-30A)

Testing Standard: UL248-14

Electrical Characteristics:

% of Ampere Rating	Opening Time
100%	4 hours Min
135%	1 hour Max
200%	120sec Max
1000%	10ms Min