


Dimension for outline:

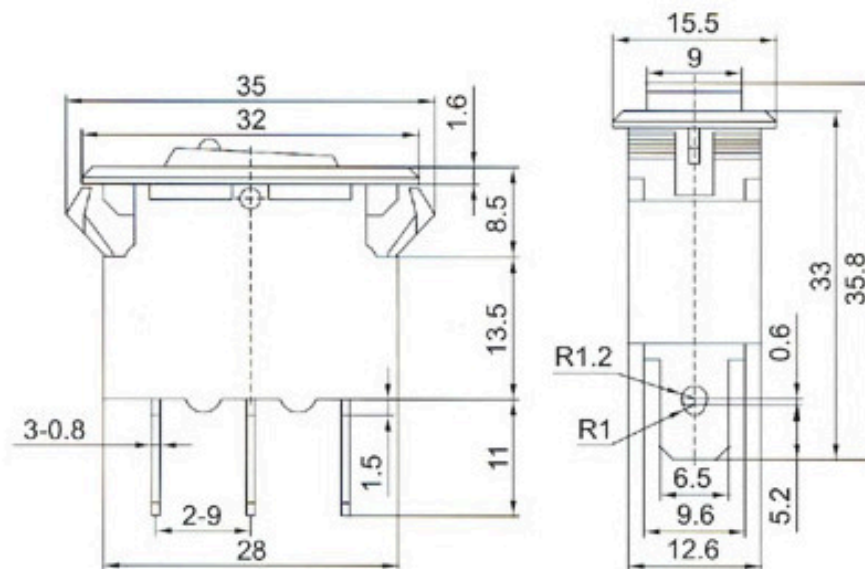

Specification:


- 1.Rating current:min.5A,max.16A
- 2.Working pressure:min.12V,max.250V
- 3.Double usage of DC and AC

Application scope: Switch protection of household appliance and electrical motor.

Current specification: 5A 6A 7A 8A 10A 15A 16A

Technique charecteristic:

Technique characteristic:the test temperature(20° --25°),the reference curve as followed:

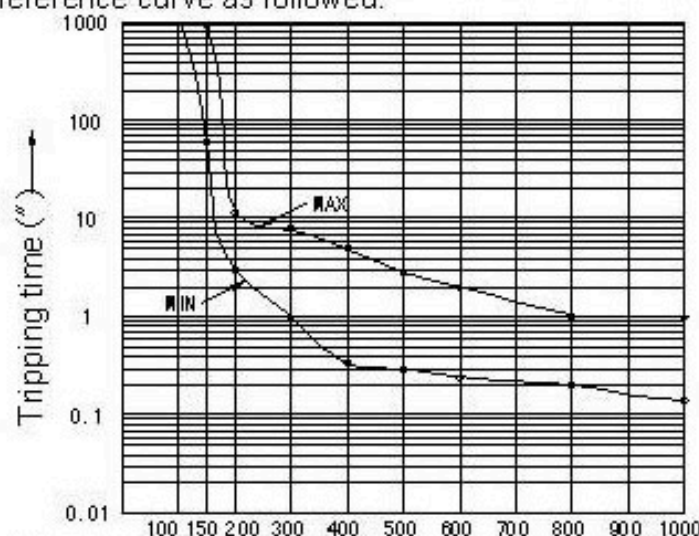

The experiment of short-circuit.ambient temperature: 25 °

Rating current PCT (%)	current overload Rating current PCT	Tripping time
100%	100%	1hour no tripping
150%	150%	1hour tripping
200%	200%	3.0-18"
300%	300%	0.8-8"
400%	400%	0.35-5"
500%	500%	0.3-2.8"
600%	600%	0.25-2"
800%	800%	0.2-1"
1000%	1000%	0.15-0.8"