



FAST RECOVER RECTIFIER

BA157 THRU BA159

VOLTAGE RANGE
CURRENT


400 to 1000 Volts
1.0 Ampere

FEATURES

- Low cost construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375"(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012 ounce, 0.33 grams

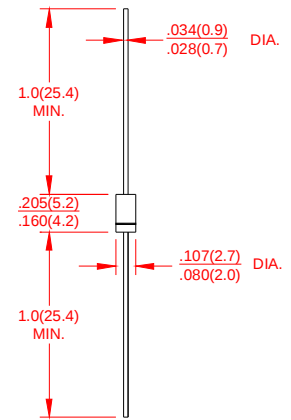

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	BA157	BA158	BA159	UNITS
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	400	600	1000	Volts
Maximum RMS Voltage		V _{RMS}	280	420	700	Volts
Maximum DC Blocking Voltage		V _{DC}	400	600	1000	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 75 °C		I _(AV)	1.0			Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	30			Amps
Maximum Instantaneous Forward Voltage @ 1.0A		V _F	1.3			Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25 °C	I _R	5.0			μA
	T _A = 100 °C		100			
Maximum Reverse Recovery Time (Note 3) T _J =25 °C		trr	150	250	500	ns
Typical Junction Capacitance (Note 1)		C _J	15			pF
Typical Thermal Resistance (Note 2)		R _{θJA}	50			°C/W
Operating Junction Temperature Range		T _J	(-55 to +150)			°C
Storage Temperature Range		T _{STG}	(-55 to +150)			°C

Notes:

1. Measured at 1.0MHz and Applied Reverse Voltage of 4.0Volts.
- 2 Thermal Resistance from junction to Ambient at .375"(9.5mm)lead length, P.C.board mounted.
- 3.Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$



FAST RECOVER RECTIFIER

BA157 THRU BA159

VOLTAGE RANGE
CURRENT

400 to 1000 Volts
1.0 Ampere

RATING AND CHARACTERISTIC CURVES BA157 THRU BA159

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

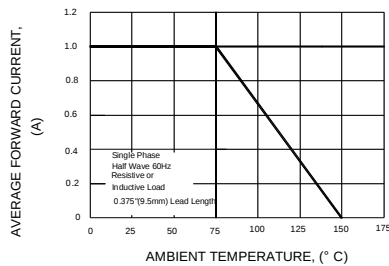


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

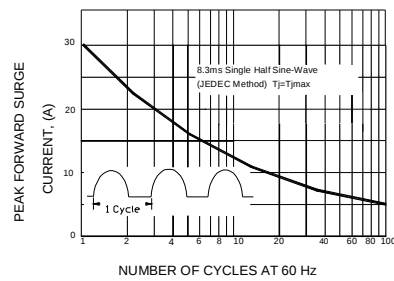


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS




FIG.4-TYPICAL REVERSE
CHARACTERISTICS

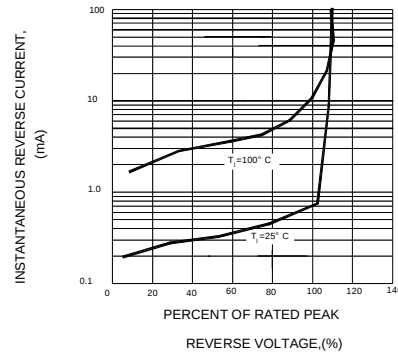


FIG.5-TYPICAL JUNCTION CAPACITANCE


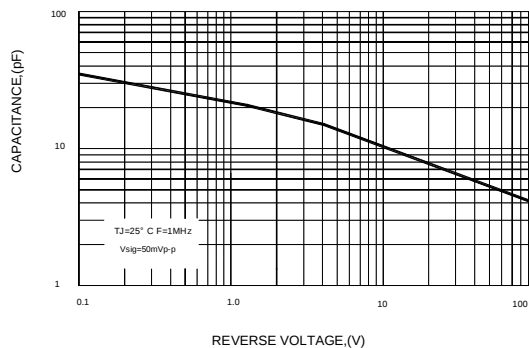


FIG.6-TEST CIRCUIT DIAGRAM AND
REVERSE RECOVERY TIME CHARACTERISTIC



NOTE: 1.Rise Time =7ns max.Input Impedance=1megohm,22pF
2.Rise time=10ns max.Source Impedance=50 ohms

