



MASTER INSTRUMENT CORPORATION

SINGLE-PHASE BRIDGE RECTIFIER KBPC1005 THRU KBPC1010 BR305 THRU BR310


VOLTAGE RANGE 50 to 1000 Volts
CURRENT 3.0 Amperes

FEATURES

- Low cost construction
- High forward surge current capability
- Ideal for printed circuit board
- High isolation voltage from case to leads
- High temperature soldering guaranteed:
260 °C/10 second, at 5 lbs. (2.3kg) tension.

MECHANICAL DATA

- Case: Molded plastic body
- Terminal: Lead solderable per MIL-STD-202E method 208C.
- Polarity: Polarity symbols molded on case
- Mounting: Thru hole for #6 screw, 5 in.-lbs torque max.
- Weight: 0.093ounce, 2.62 grams

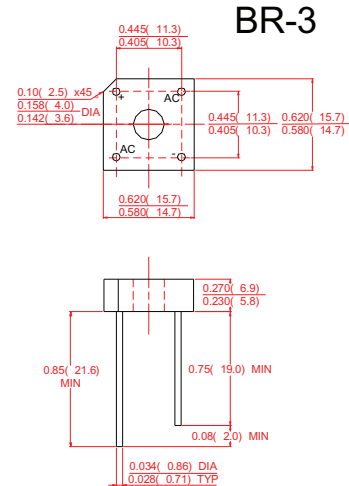

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load derate current by 20%.

	SYMBOLS	KBPC1005 BR305	KBPC101 BR31	KBPC102 BR32	KBPC104 BR34	KBPC106 BR36	KBPC108 BR38	KBPC1010 BR310	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, at	T _C =50℃ (Note 2)	I _(AV)	3.0						Amps
	T _A =25℃ (Note 2)		2.0						
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)		I _{FSM}	60						Amps
Rating for Fusing(t<8.3ms)		I ² T	15						A ² S
Maximum Instantaneous Forward Voltage at 5.0A		V _F	1.0						Volts
Maximum DC Reverse Current at rated DC blocking voltage per element	T _A =25℃	I _R	5.0						μAmps
	T _A =100℃		0.5						mAmps
Isolation Voltage from case to leads		V _{ISO}	2500						μAmps
Typical Junction Capacitance Resistance (Note 1)		C _J	20						℃/W
Typical Thermal Resistance per element (Note 2)		R _{θJA}	12						℃/W
Operating Temperature Range		T _J	-55 to +150						℃
Storage Temperature Range		T _{STG}	-55 to +150						℃
NOTES: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts 2. Unit mounted on 4.0"×4.0"×0.11" thick (10.5×10.5×0.3mm) Al. plate. 3. Unit mounted on P.C.B at 0.375" (9.5mm) lead length with 0.5"×0.5" (12×12mm) copper pads.									



MASTER INSTRUMENT CORPORATION

SINGLE-PHASE BRIDGE RECTIFIER
KBPC1005 THRU KBPC1010
BR305 THRU BR310

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 3.0 Amperes

RATINGS AND CHARACTERISTIC CURVES KBPC1005 THRU KBPC110 BR305 BR310

FIG.1-DERATING CURVE FOR
OUTPUT DERTAINING CURVE

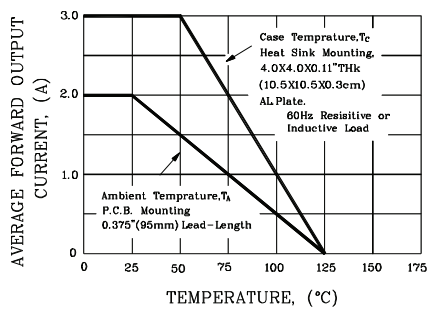


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT PER ELEMENT

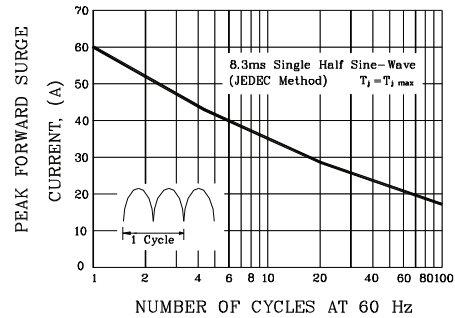


FIG.3-TYPICAL FORWARD CHARACTERISTICS
PER BRIDGE ELEMENT

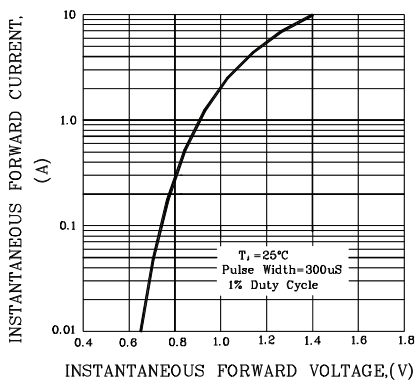


FIG.4-TYPICAL REVERSE CHARACTERISTICS
PER BRIDGE ELEMENT

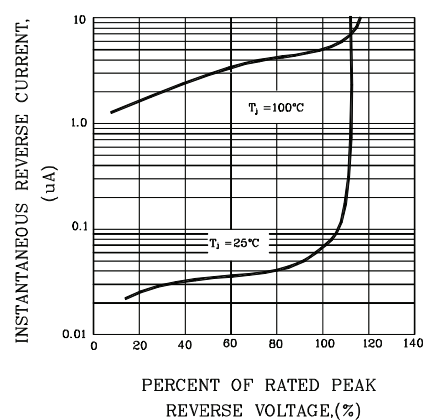


FIG.5-TYPICAL JUNCTION CAPACITANCE
PER BRIDGE ELEMENT

