

CD4043BM/CD4043BC Quad TRI-STATE[®] NOR R/S Latches **CD4044BM/CD4044BC Quad TRI-STATE[®] NAND R/S Latches**

General Description

CD4043BM/CD4043BC are quad cross-couple TRI-STATE CMOS NOR latches, and CD4044BM/CD4044BC are quad cross-couple TRI-STATE CMOS NAND latches. Each latch has a separate Q output and individual SET and RESET inputs. There is a common TRI-STATE ENABLE input for all four latches. A logic "1" on the ENABLE input connects the latch states to the Q outputs. A logic "0" on the ENABLE input disconnects the latch states from the Q outputs resulting in an open circuit condition on the Q output. The TRI-STATE feature allows common bussing of the outputs.



Features

- Wide supply voltage range 3V to 15V
- Low power 100 nW (typ.)
- High noise immunity 0.45 V_{DD} (typ.)
- Separate SET and RESET inputs for each latch
- NOR and NAND configuration
- TRI-STATE output with common output enable

Applications

- Multiple bus storage
- Strobed register
- Four bits of independent storage with output enable
- General digital logic

Connection Diagrams

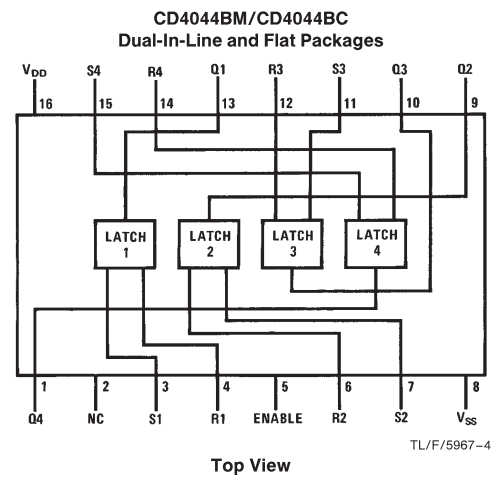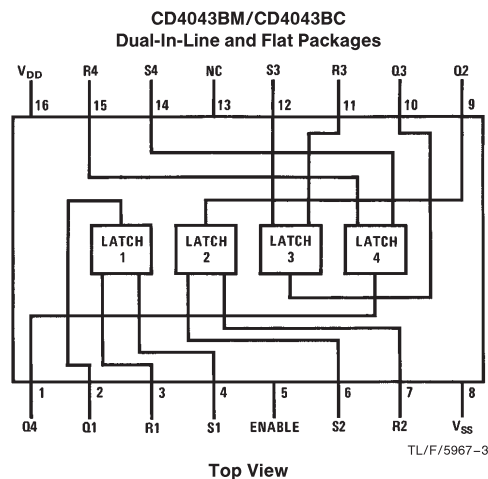

Truth Table

CD4043BM/CD4043BC				CD4044BM/CD4044BC			
S	R	E	Q	S	R	E	Q
X	X	0	OC	X	X	0	OC
0	0	1	NC	1	1	1	NC
1	0	1	1	0	1	1	1
0	1	1	0	1	0	1	0
1	1	1	Δ	0	0	1	ΔΔ

OC — TRI-STATE
 NC — No change
 X — Don't care
 Δ — Dominated by S = 1 input
 ΔΔ — Dominated by R = 0 input

CD4043BM/CD4043BC Quad TRI-STATE[®] NOR R/S Latches
CD4044BM/CD4044BC Quad TRI-STATE[®] NAND R/S Latches

Absolute Maximum Ratings (Notes 1 and 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{DD})	−0.5V to +18V
Input Voltage (V_{IN})	−0.5V to V_{DD} + 0.5V
Storage Temperature Range (T_S)	−65°C to +150°C
Power Dissipation (P_D)	
Dual-In-Line	700 mW
Small Outline	500 mW
Lead Temperature (T_L)	
(Soldering, 10 seconds)	260°C

Recommended Operating Conditions (Note 2)

Supply Voltage (V_{DD})	3.0V to 15V
Input Voltage (V_{IN})	0 to V_{DD} V
Operating Temperature Range (T_A)	
CD4043BM, CD4044BM	−55°C to +125°C
CD4043BC, CD4044BC	−40°C to +85°C

DC Electrical Characteristics CD4043BM/CD4044BM (Note 2)

Symbol	Parameter	Conditions	−55°C		+25°C			+125°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I_{DD}	Quiescent Device Current	$V_{DD} = 5V, V_{IN} = V_{DD}$ or V_{SS} $V_{DD} = 10V, V_{IN} = V_{DD}$ or V_{SS} $V_{DD} = 15V, V_{IN} = V_{DD}$ or V_{SS}		5.0 10 20		0.01 0.01 0.02	5.0 10 20		150 300 600	μA μA μA
V_{OL}	Low Level Output Voltage	$ I_O \leq 1 \mu A, V_{IL} = 0V, V_{IH} = V_{DD}$ $V_{DD} = 5.0V$ $V_{DD} = 10V$ $V_{DD} = 15V$		0.05 0.05 0.05		0 0 0	0.05 0.05 0.05		0.05 0.05 0.05	V V V
V_{OH}	High Level Output Voltage	$ I_O \leq 1 \mu A, V_{IL} = 0V, V_{IH} = V_{DD}$ $V_{DD} = 5.0V$ $V_{DD} = 10V$ $V_{DD} = 15V$	4.95 9.95 14.95		4.95 9.95 14.95	5.0 10 15		4.95 9.95 14.95		V V V
V_{IL}	Low Level Input Voltage	$ I_O \leq 1 \mu A$ $V_{DD} = 5.0V, V_O = 0.5V$ or 4.5V $V_{DD} = 10V, V_O = 1.0V$ or 9.0V $V_{DD} = 15V, V_O = 1.5V$ or 13.5V		1.5 3.0 4.0		2.25 4.5 6.75	1.5 3.0 4.0		1.5 3.0 4.0	V V V
V_{IH}	High Level Input Voltage	$ I_O \leq 1 \mu A$ $V_{DD} = 5.0V, V_O = 0.5V$ or 4.5V $V_{DD} = 10V, V_O = 1.0V$ or 9.0V $V_{DD} = 15V, V_O = 1.5V$ or 13.5V	3.5 7.0 11		3.5 7.0 11	2.75 5.5 8.25		3.5 7.0 11		V V V
I_{OL}	Low Level Output Current	$V_{IL} = 0V, V_{IH} = V_{DD}$ $V_{DD} = 5.0V, V_O = 0.4V$ $V_{DD} = 10V, V_O = 0.5V$ $V_{DD} = 15V, V_O = 1.5V$	0.64 1.6 4.2		0.51 1.3 3.4	1.0 2.6 6.8		0.36 0.9 2.4		mA mA mA
I_{OH}	High Level Output Current	$V_{IL} = 0V, V_{IH} = V_{DD}$ $V_{DD} = 5.0V, V_O = 4.6V$ $V_{DD} = 10V, V_O = 9.5V$ $V_{DD} = 15V, V_O = 13.5V$	−0.64 −1.6 −4.2		−0.51 −1.3 −3.4	−0.4 −1.0 −3.0		−0.36 −0.9 −2.4		mA mA mA
I_{IN}	Input Current	$V_{DD} = 15V, V_{IN} = 0V$ $V_{DD} = 15V, V_{IN} = 15V$		−0.1 0.1		−10 ^{−5} 10 ^{−5}	−0.1 0.1		−1.0 1.0	μA μA

DC Electrical Characteristics CD4043BC/CD4044BC (Note 2)

Symbol	Parameter	Conditions	−40°C		+25°C			+85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I_{DD}	Quiescent Device Current	$V_{DD} = 5V, V_{IN} = V_{DD}$ or V_{SS} $V_{DD} = 10V, V_{IN} = V_{DD}$ or V_{SS} $V_{DD} = 15V, V_{IN} = V_{DD}$ or V_{SS}		20 40 80		0.01 0.01 0.02	20 40 80		150 300 600	μA μA μA
V_{OL}	Low Level Output Voltage	$ I_O \leq 1 \mu A, V_{IL} = 0V, V_{IH} = V_{DD}$ $V_{DD} = 5.0V$ $V_{DD} = 10V$ $V_{DD} = 15V$		0.05 0.05 0.05		0 0 0	0.05 0.05 0.05		0.05 0.05 0.05	V V V
V_{OH}	High Level Output Voltage	$ I_O \leq 1 \mu A, V_{IL} = 0V, V_{IH} = V_{DD}$ $V_{DD} = 5.0V$ $V_{DD} = 10V$ $V_{DD} = 15V$	4.95 9.95 14.95		4.95 9.95 14.95	5.0 10 15		4.95 9.95 14.95		V V V

DC Electrical Characteristics CD4043BC/CD4044BC (Continued)

Symbol	Parameter	Conditions	−40°C		+25°C			+85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
V _{IL}	Low Level Input Voltage	I _O ≤ 1 μA								
		V _{DD} = 5.0V, V _O = 0.5V or 4.5V		1.5		2.25	1.5		1.5	V
		V _{DD} = 10V, V _O = 1.0V or 9.0V		3.0		4.5	3.0		3.0	V
		V _{DD} = 15V, V _O = 1.5V or 13.5V		4.0		6.75	4.0		4.0	V
V _{IH}	High Level Input Voltage	I _O ≤ 1 μA								
		V _{DD} = 5.0V, V _O = 0.5V or 4.5V	3.5		3.5			3.5		V
		V _{DD} = 10V, V _O = 1.0V or 9.0V	7.0		7.0			7.0		V
		V _{DD} = 15V, V _O = 1.5V or 13.5V	11		11			11		V
I _{OL}	Low Level Output Current (Note 3)	V _{IL} = 0V, V _{IH} = V _{DD}								
		V _{DD} = 5.0V, V _O = 0.4V	0.52		0.44	0.88		0.36		mA
		V _{DD} = 10V, V _O = 0.5V	1.3		1.1	2.2		0.9		mA
		V _{DD} = 15V, V _O = 1.5V	3.6		3.0	6.0		2.4		mA
I _{OH}	High Level Output Current (Note 3)	V _{IL} = 0V, V _{IH} = V _{DD}								
		V _{DD} = 5.0V, V _O = 4.6V	−0.52		−0.44	−0.32		−0.36		mA
		V _{DD} = 10V, V _O = 9.5V	−1.3		−1.1	−0.8		−0.9		mA
		V _{DD} = 15V, V _O = 13.5V	−3.6		−3.0	−2.4		−2.4		mA
I _{IN}	Input Current	V _{DD} = 15V, V _{IN} = 0V	−0.3			−0.3			−1.0	μA
		V _{DD} = 15V, V _{IN} = 15V	0.3			0.3			1.0	μA

AC Electrical Characteristics*

T_A = 25°C, C_L = 50 pF, R_L = 200k, input t_r = t_f = 20 ns, unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t _{PLH} , t _{PHL}	Propagation Delay S or R to Q	V _{DD} = 5.0V		175	350	ns
		V _{DD} = 10V		75	175	ns
		V _{DD} = 15V		60	120	ns
t _{PZH} , t _{PHZ}	Propagation Delay Enable to Q (High)	V _{DD} = 5.0V		115	230	ns
		V _{DD} = 10V		55	110	ns
		V _{DD} = 15V		40	80	ns
t _{PZL} , t _{PLZ}	Propagation Delay Enable to Q (Low)	V _{DD} = 5.0V		100	200	ns
		V _{DD} = 10V		50	100	ns
		V _{DD} = 15V		40	80	ns
t _{THL} , t _{TLH}	Transition Time	V _{DD} = 5.0V		100	200	ns
		V _{DD} = 10V		50	100	ns
		V _{DD} = 15V		40	80	ns
t _{WO}	Minimum SET or RESET Pulse Width	V _{DD} = 5.0V		80	160	ns
		V _{DD} = 10V		40	80	ns
		V _{DD} = 15V		20	40	ns
C _{IN}	Input Capacitance			5.0	7.5	pF

*AC Parameters are guaranteed by DC correlated testing.


Note 1: “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The tables of “Recommended Operating Conditions” and “Electrical Characteristics” provide conditions for actual device operation.

Note 2: V_{SS} = 0V unless otherwise specified.

Note 3: I_{OH} and I_{OL} are tested one output at a time.


Schematic Diagrams

CD4043BM/CD4043BC

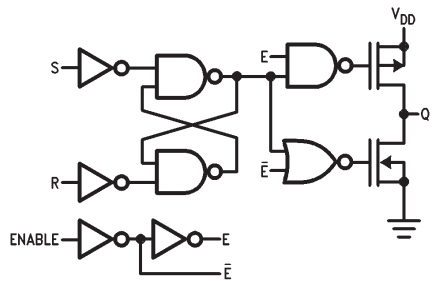

TL/F/5967-1


CD4044BM/CD4044BC

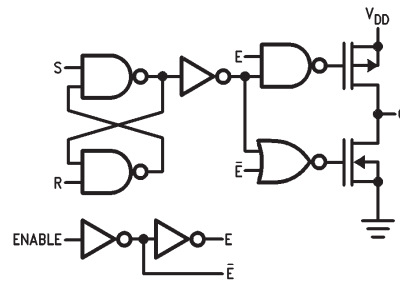

TL/F/5967-2


Timing Waveforms

CD4043B

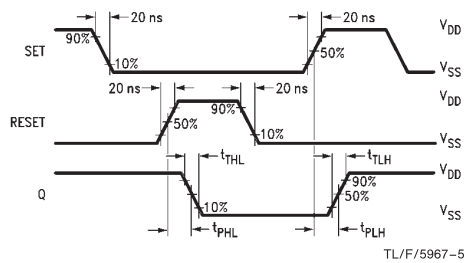


TL/F/5967-5

CD4044B

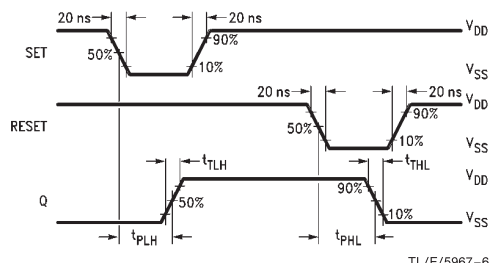

TL/F/5967-6

Enable Timing

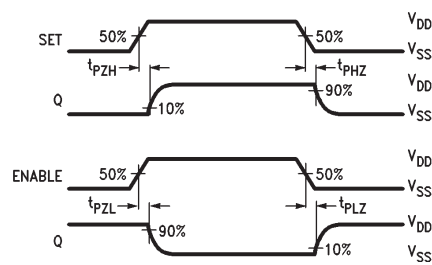

TL/F/5967-7

Physical Dimensions inches (millimeters)

0.785
[19.94] MAX

16 9

0.220-0.310
[5.59-7.87]

R 0.005-0.020 TYP
[0.13-0.51]

R 0.025
[0.64]

1 8

0.037 ± 0.005 TYP
[0.94 ± 0.13]

0.055 ± 0.005 TYP
[1.40 ± 0.13]

0.020-0.060 TYP
[0.51-1.52]

0.150 MIN TYP
[3.81]

90° ± 4° TYP

0.018 ± 0.003 TYP
[0.46 ± 0.08]

0.290-0.320
[7.37-8.13]

0.180 MAX
[4.57]

GLASS SEALANT

0.010 ± 0.002 TYP
[0.25 ± 0.05]

95° ± 5° TYP

0.310-0.410
[7.87-10.41]

0.005 MIN TYP
[0.13]

0.200 MAX TYP
[5.08]

0.125-0.200 TYP
[3.18-5.08]

0.080 MAX
[2.03] BOTH ENDS


0.100 ± 0.010 TYP
[2.54 ± 0.25]

Ceramic Dual-In-Line Package (J)
Order Number CD4043BMJ, CD4043BCJ, CD4044BMJ or CD4044BCJ
NS Package Number J16A

J16A (REV L)

Ceramic Dual-In-Line Package (J)
Order Number CD4043BMJ, CD4043BCJ, CD4044BMJ or CD4044BCJ
NS Package Number J16A

Physical Dimensions inches (millimeters) (Continued)

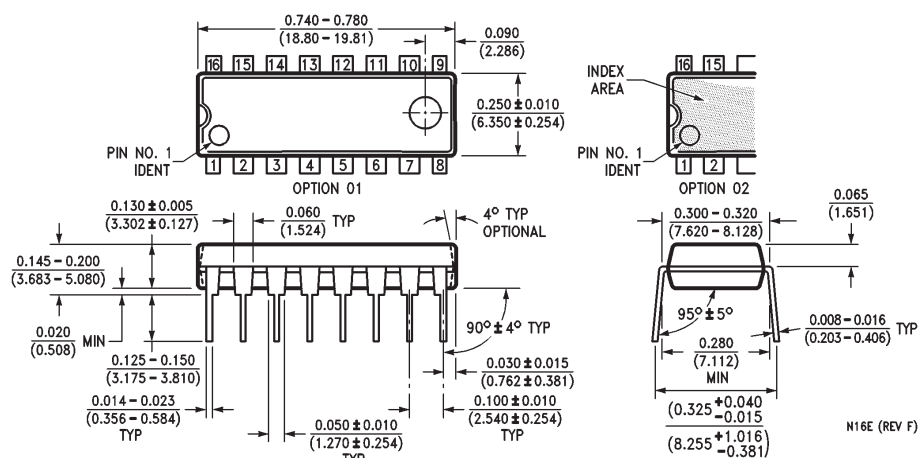

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408