

## HALOSTAR STARLITE

---

20 W 12 V GY6.35



---

### Product benefits

- Brilliant accent light
- Incredibly small dimensions for revolutionary new luminaire designs
- Approved for use in open luminaires (to IEC 60598-1)
- Axial filament for optimum directional light
- Special pins for corrosion protection
- UV filter
- Contains no mercury, can be thrown away with normal household waste

---

### Product features

- Average life: 4,000 h
- 100 % dimmable
- Base: G4, GY6.35
- Color rendering index Ra: 100



## Technical data

---

### Electrical data

|                                  |                       |
|----------------------------------|-----------------------|
| Rated wattage                    | 20 W                  |
| Nominal wattage                  | 20 W                  |
| Rated number of switching cycles | 1000000 <sup>1)</sup> |
| Rated power factor $\lambda$     | 1.00                  |

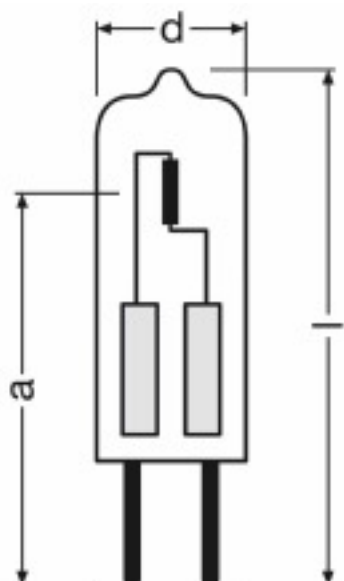
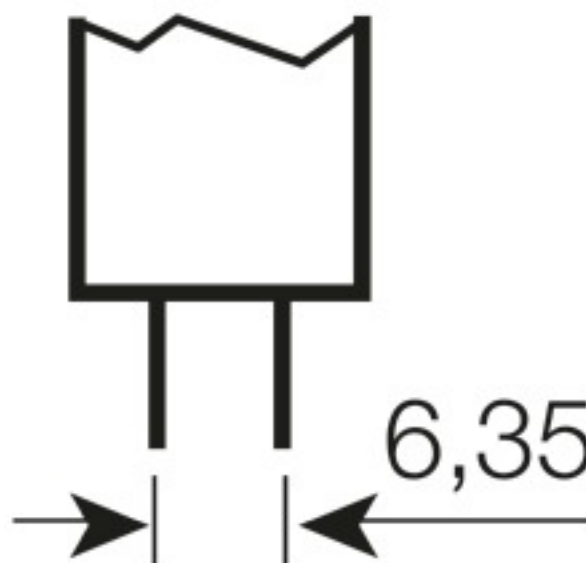
<sup>1)</sup> At 1 s on / 1 s off

### Light technical data

|                                         |        |
|-----------------------------------------|--------|
| Nominal luminous flux                   | 290 lm |
| Rated luminous flux                     | 290 lm |
| Rated color temperature                 | 2800 K |
| Rated color rendering index Ra          | 100    |
| Rated starting time                     | 0.0 s  |
| Rated warm-up time (60 %)               | 0 s    |
| Lumen main.fact.at end of nom.life time | 0.80   |

### Dimensions & weight

|                           |         |
|---------------------------|---------|
| Length                    | 44.0 mm |
| Overall length            | 44.0 mm |
| Diameter                  | 12.0 mm |
| Light center length (LCL) | 30.0 mm |
| Outer bulb                | T12     |

*Product line drawing with letters**Base*

#### Colors & materials

|                            |        |
|----------------------------|--------|
| Rated lamp mercury content | 0.0 mg |
| Mercury-free               | Yes    |

#### Lifespan

|                        |        |
|------------------------|--------|
| Nominal lamp life time | 4000 h |
| Rated lamp life time   | 4000 h |

#### Additional product data

|                             |        |
|-----------------------------|--------|
| Base (standard designation) | GY6.35 |
| Filament setting            | Axial  |

#### Capabilities

|          |     |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

#### Capabilities

|                  |      |
|------------------|------|
| Burning position | hs30 |
|------------------|------|

#### Country specific categorizations

|       |                               |
|-------|-------------------------------|
| ILCOS | HSGST/C/UB-20-12-GY6,35-12/30 |
|-------|-------------------------------|

## Logistical Data

| Product code  | Packaging unit<br>(Pieces/Unit) | Dimensions (height x<br>width x length) | Gross weight | Volume              |
|---------------|---------------------------------|-----------------------------------------|--------------|---------------------|
| 4050300328171 | Folding carton box<br>1         | 25mm x 20mm x<br>70mm                   | 5.00g        | 0.04dm <sup>3</sup> |
| 4050300942186 | Shipping carton box<br>40       | 121mm x 107mm x<br>144mm                | 229.00g      | 1.86dm <sup>3</sup> |

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.