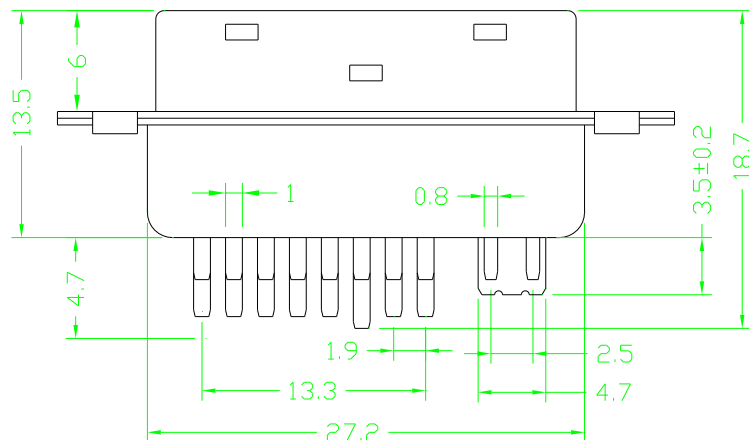


### Specifications:

Contact Resistance: 30mΩ max

Insulator Resistance: 1000MΩ min.at DC 500V


Rated Current : 3AMP

### Dielectric Withstanding:

Voltage: AC 1000V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

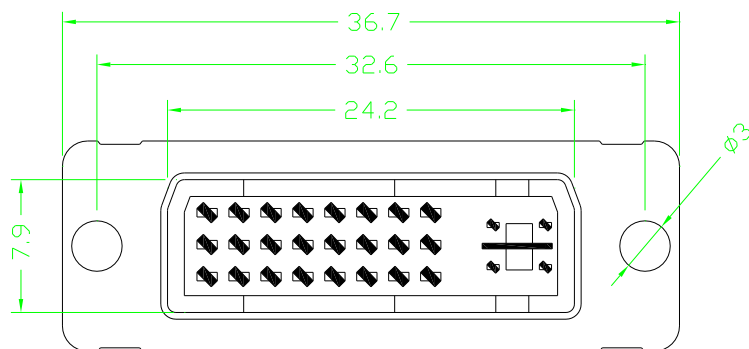

| 设计/Designed by                                                                                                                                   | 绘图/Drawing by | 审核/Checked by | 批准/Approved by | 未注公差<br>General Tolerance |              |
|--------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------|----------------|---------------------------|--------------|
| <div><div>新亚联合科技<br/>XINYA UNITED TECH CO.,LTD.</div></div> |               | 图名/Title      | 文件编号/File No.  | X. ±0.2                   | X.° ±2°      |
|                                                                                                                                                  |               | 164产品图        | QJ/XYT-12128   | .X ±0.1                   | .X° ±1°      |
|                                                                                                                                                  |               |               | 页序/Sheet       | .XX ±0.05                 | .XX° ±0.5°   |
|                                                                                                                                                  |               |               |                | .XXX ±0.01                |              |
|                                                                                                                                                  |               | 备注/Remark     |                |                           | 单位/Units: mm |