

Specifications:

Contact Resistance: 30mΩ max

Insulator Resistance: 1000MΩ min.at DC 500V




Rated Current : 3AMP

Dielectric Withstanding:

Voltage: AC 1000V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

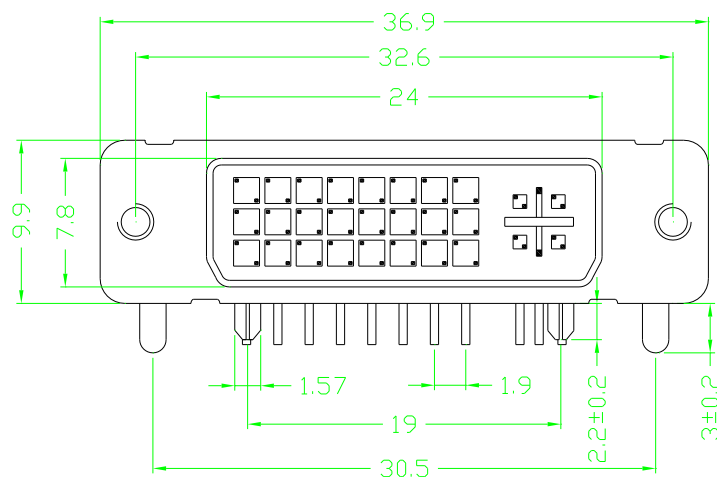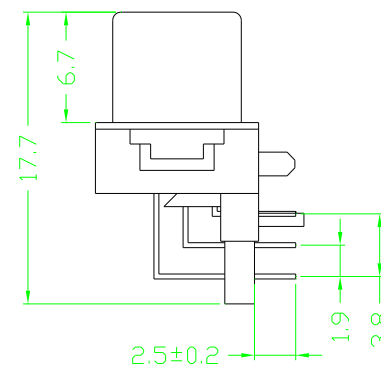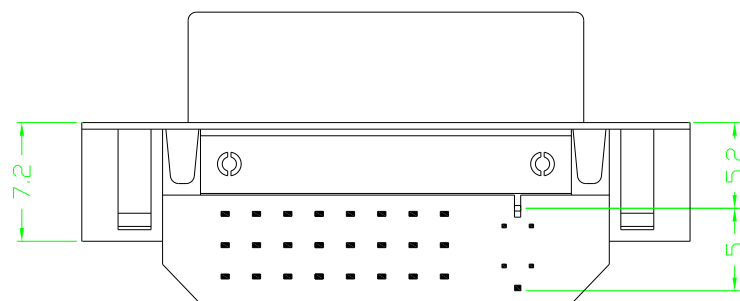

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	X. ±0.2	X." ±2°
		166产品图	QJ/XYT-12130	.X ±0.1	.X" ±1°
			页序/Sheet	.XX ±0.05	.XX" ±0.5°
				.XXX ±0.01	
		备注/Remark			单位/Units: mm