
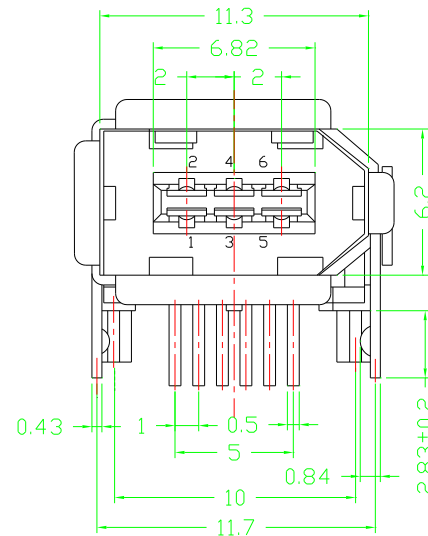


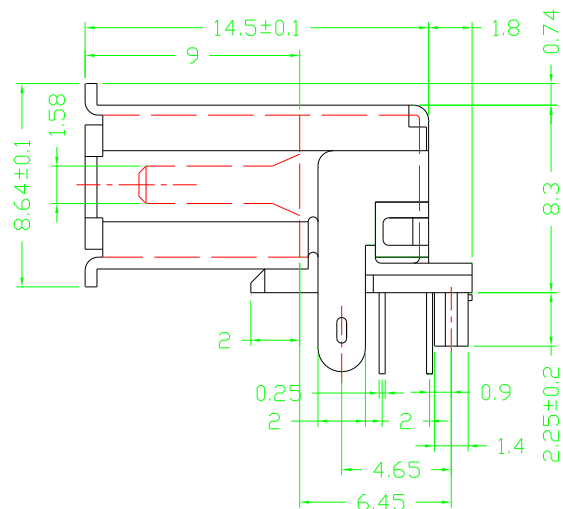

Specifications:

Contact Resistance: 2mΩ max

Insulator Resistance: 1000MΩ min.at DC 500V

Rating Current: 2AMP


Rating Voltage: 30V AC

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Contact: Copper Alloy

Housing: Thermoplastic(UL 94V-0)

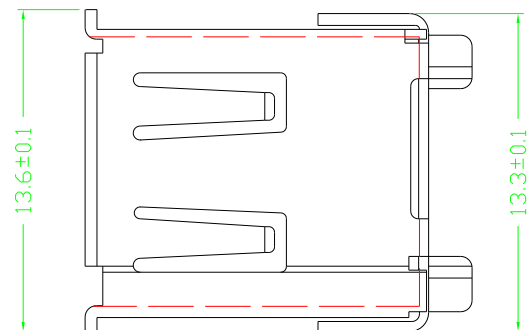

要求:

1. 铁壳无明显起皮、杂色、生锈, 断面毛边不超过0.05mm。
2. 端子无松动感, 且整排端子成一直线, 端子之间相互平行, 塑件无明显错位。
3. 铆合要紧密, 铁壳接合处无明显缝隙, 且铆合处平滑。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.				X. ±0.2	X." ±2°
		图名 /title	文件编号/File No.	.X ±0.1	.X" ±1°
		171-B产品图	QJ/XYT-12133	.XX ±0.05	.XX" ±0.5°
			页序/Sheet	.XXX ±0.01	
		备注 /Remark	单位/Units: mm		