
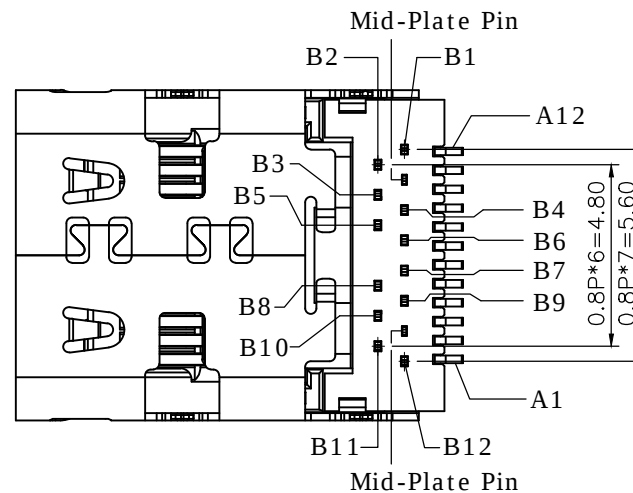
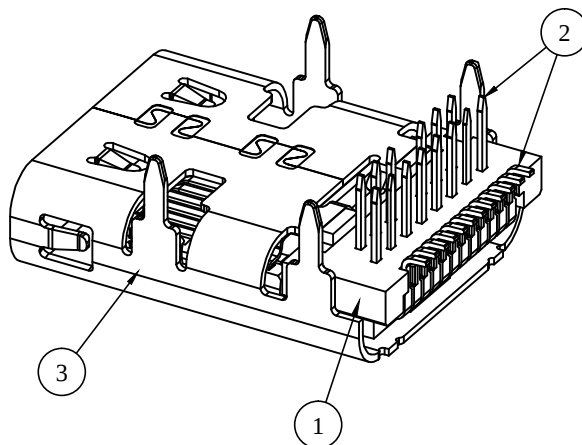
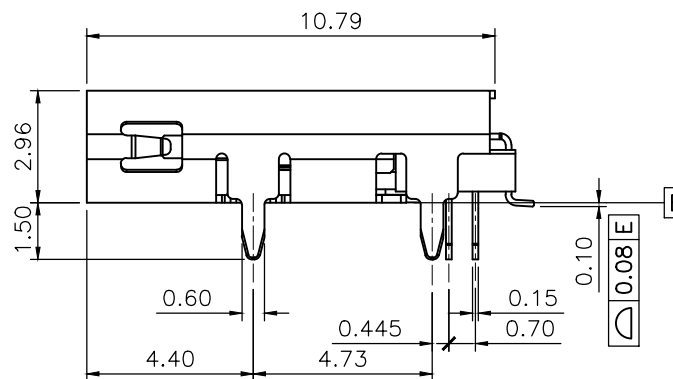
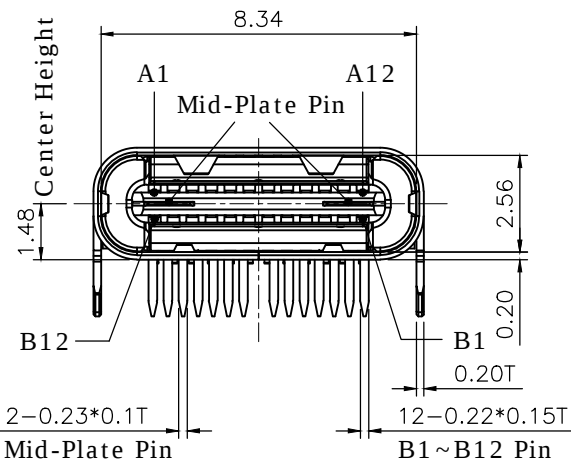
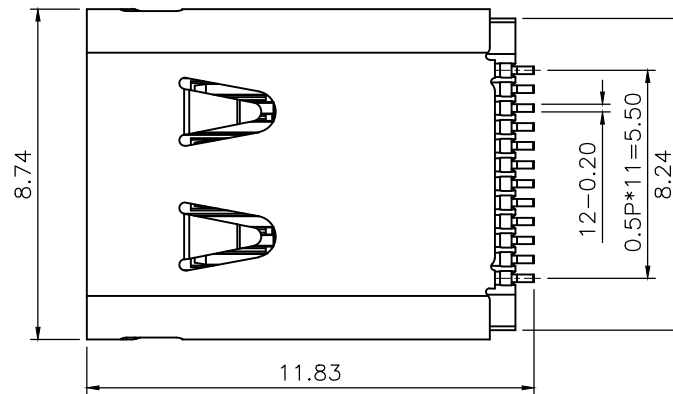


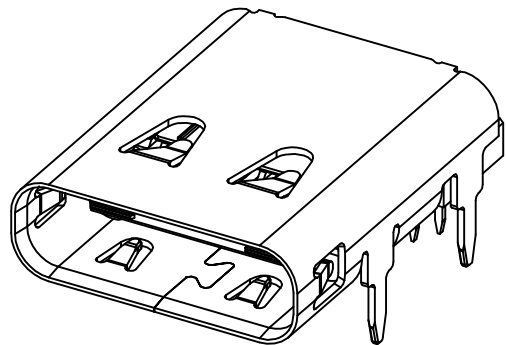

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2015/04/23
2	REVISED BY ECN E160121001	FROS	2016/01/28
3	REVISED BY ECR 1900008	FROS	2019/05/22

△ SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 5A MAX.
- 1.2 Voltage Rating: 20V AC/DC
- 1.3 Contact Resistance: 40mΩ
- 1.4 Insulation Resistance: 100MΩ
- 1.5 Dielectric Withstanding Voltage: 100VAC

2. MECHANICAL

- 2.1 Durability: 10,000 Cycle
- 2.2 Insertion Force: 5N to 20N
- 2.3 Extraction Force: 8N to 20N

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C~+105°C

4. SOLDER ABILITY

- 4.1 Recommended IR Reflow(Wave Soldering) Temperature: 260°C

3	SHELL	STAINLESS STEEL, 50 TO 100u" NICKEL PLATING	
2	CONTACT	COPPER ALLOY, CONTACT AREA: 30u" Pd-Ni + 2u" Au,	
		SOLDER TAILS: 100u" TO 200u" TIN PLATING	
		UNDER-PLATING: 40u" TO 80u" NICKEL	
1	INSULATOR	HIGH TEMPERATURE THERMOPLASTIC	
NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
m m	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
 ATTEND			
WWW.ATTEND.COM.TW			
DRAWN	Fros	2015/04/23	DRAWN NAME: USB 3.1 C type Hybrid Receptacle, Right-Angle, 2u" Au (30u" Pb-Ni)
CHECKED	Zola	2015/04/23	
APPROVED	Albert	2015/04/23	
	SCALE 5/1	SHEET 1/2	SIZE A4
PRODUCT NO.		217B-AG01	
FILE NAME		217B-AG01_B_3	



WWW.ATTEND.COM.TW

