

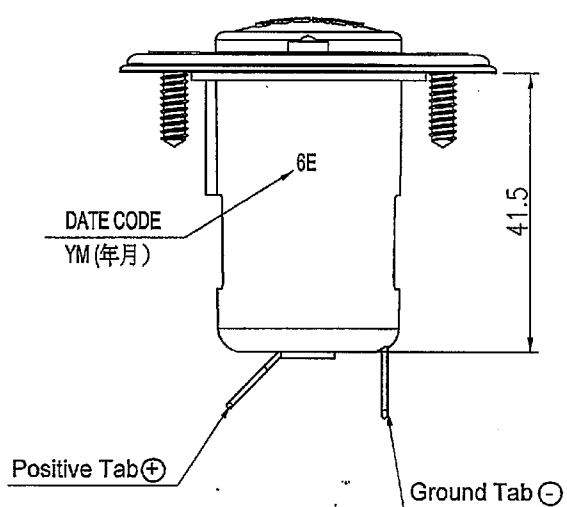
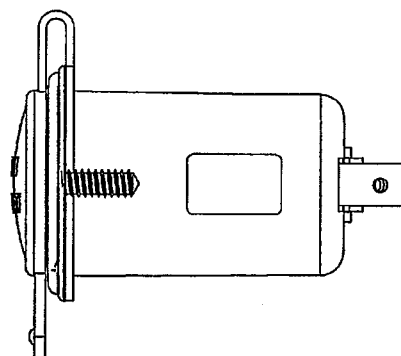


Rating	13.6VDC 20A max.	Mounting Hole 
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	0° ~60°C	
Fuse	With 20A MGC Fuse	

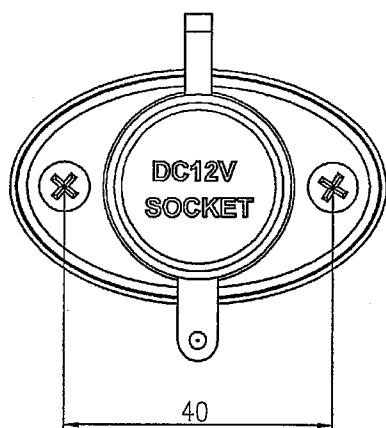

- This socket to fit with $\phi 21$ plugs.
- Dust cover protection.
- Wire Rating 12Awg.

04/20/15	劉嘉麗	本體增加DATE CODE。			△	
02/25/05	陳麗華	C1/PDM/A13/A13-106/A13-106			△	
Date	Name	Description			No.	
Drawn	Checked	Approved	SCI BOM No.	1250363	Model Name	Lighter Socket
劉嘉麗	叶志伟	<i>Simon</i>	Customer No.		Model No.	A13-106
05/09/16	5/9-16	5/10-16	Unit	mm	Shin Chin Industrial Co., Ltd.	
						Rev. 2

1250363, 1250508, 1250762