


序号/RevNo.	名称/Title	文件编号/File No.
1	上铁壳	QJ/XYT-11030~11033
2	下铁壳	QJ/XYT-11034~11037
3	100M塑料件	QJ/XYT-11006~11009
4	100M端子	QJ/XYT-11001~11002

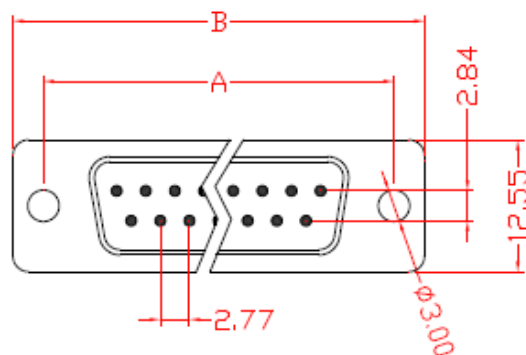

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resisitance: 1000MΩ min.at DC 500V

Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature:-55℃--+105℃

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B	C
9	24.99	30.81	19.36
15	33.32	39.20	27.64
25	47.04	53.10	41.08
37	63.50	69.50	57.38

