

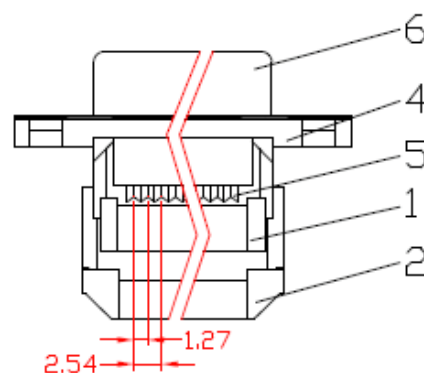


序号/RevNo.	名称/Title	文件编号/File No.
1	103中盖	QJ/XYT-11051~11054
2	103反折盖	QJ/XYT-11055~11058
3	103后盖	QJ/XYT-11059~11062
4	103F塑件主体	QJ/XYT-11067~11070
5	103F端子	QJ/XYT-11049
6	铁壳	QJ/XYT-11085~11088

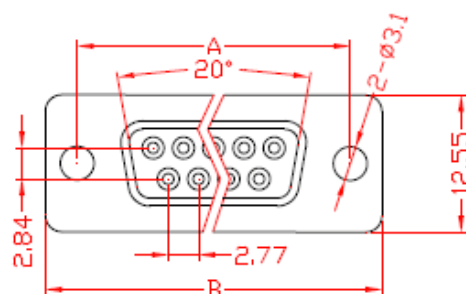

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature:-55℃--+105℃

Contact: Phosphor Bronze

Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B
9	24.99	30.81
15	33.32	39.20
25	47.04	53.10
37	63.50	69.50

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.				X. ±0.2	X.* ±2*
				.X ±0.1	.X* ±1*
				.XX ±0.05	.XX* ±0.5*
				.XXX ±0.01	
图名/Title		文件编号/File No.		单位/Units: mm	
103-A F产品图		QJ/XYT-12008			
备注/Remark		页序/Sheet			