


序号/RevNo.	名称/Title	文件编号/File No.
1	上铁壳	QJ/XYT-11030~11033
2	下铁壳	QJ/XYT-11034~11037
3	101M前料密件	QJ/XYT-11040~11043
4	101M后料密件	QJ/XYT-11044~11047
5	101M端子	QJ/XYT-11038

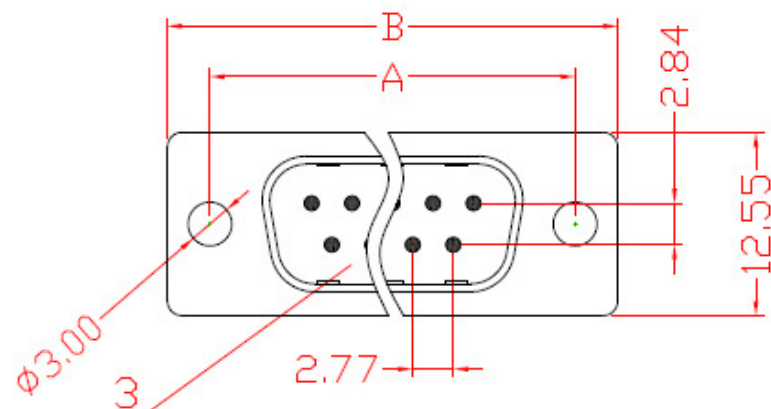

Specifications:

Contact Resistance: $30\text{m}\Omega$ max.at DC 100 mA

Insulator Resistance: $1000\text{M}\Omega$ min.at DC 500V

Current Rating: 5AMP



Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature: -55°C --- $+105^{\circ}\text{C}$

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

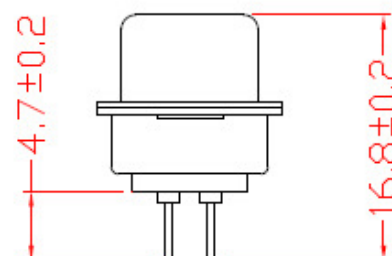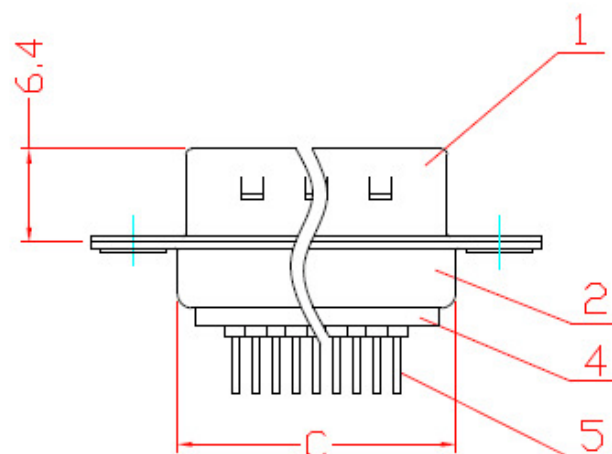

Position	A	B	C
9	24.99	30.81	19.36
15	33.32	39.20	27.64
25	47.04	53.10	41.08
37	63.50	69.50	57.38

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.				x. ±0.2	x.* ±2*
				.x ±0.1	.x.* ±1*
				.xx ±0.05	.xx.* ±0.5*
				.xxx ±0.01	
图名/Title		文件编号/File No.		页序/Sheet	
101M产品图		QJ/XYT-12003			
备注/Remark				单位/units: mm	