


序号/RevNo.	名称/Title	文件编号/File No.
1	上铁壳	QJ/XYT-11026~11029
2	下铁壳	QJ/XYT-11034~11037
3	104F塑件主体	QJ/XYT-11076
4	104F塑件后盖	QJ/XYT-11077
5	104F端子(短)	QJ/XYT-11071
6	104F端子(长)	QJ/XYT-11072

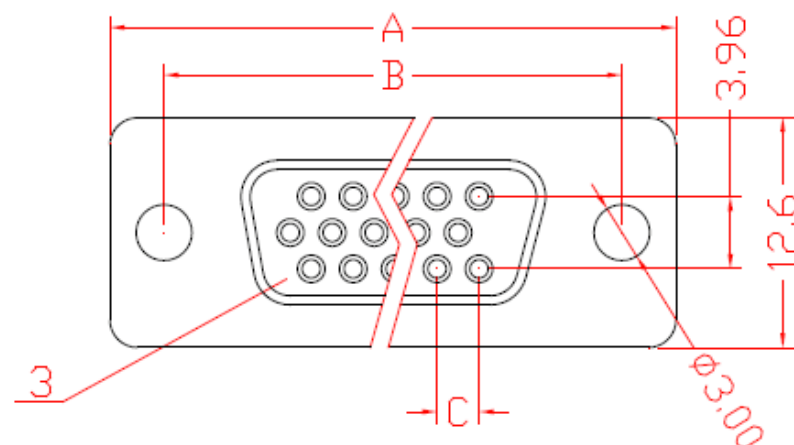


Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator resistance: 1000MΩ min.at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature:-55℃---+105℃
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

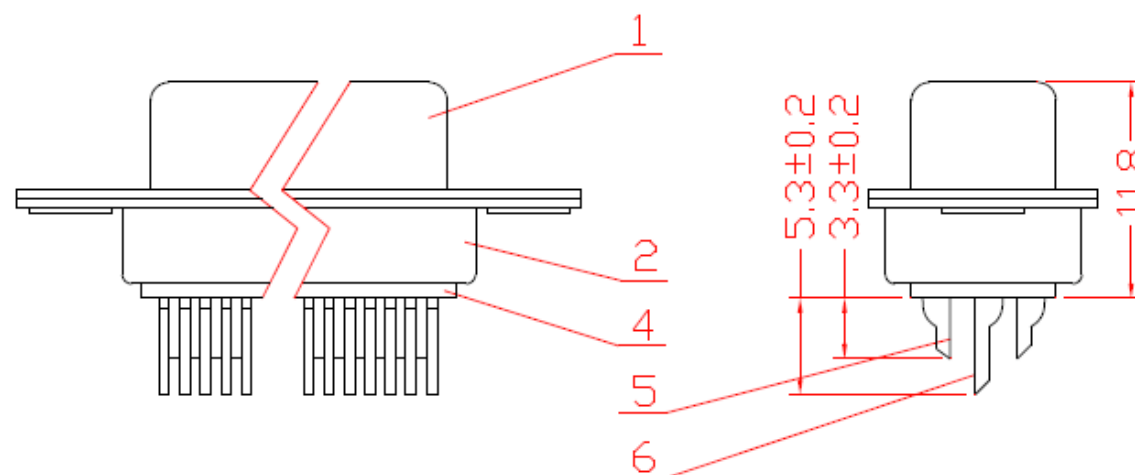

Position	A	B	C
15	30.9	24.99	2.29
26	39.1	33.32	2.29
44	53.0	47.04	2.29
62	69.3	63.50	2.41

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.				X. ±0.2	X. ±2*
				.X ±0.1	.X ±1*
				.XX ±0.05	.XX ±0.5*
				.XXX ±0.01	
图名/Title				文件编号/File No.	
104F产品图				QJ/XYT-12010	
备注/Remark				页序/Sheet	
				单位/units:	mm