

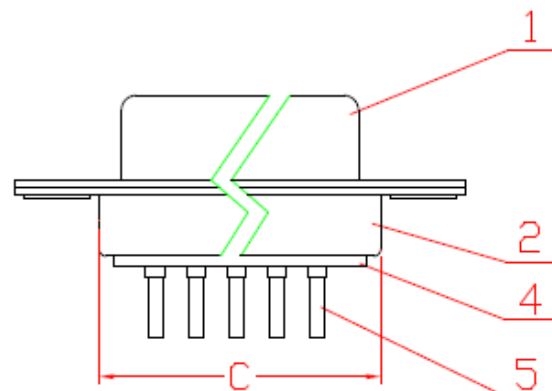


序号/RevNo.	名称/Title	文件编号/File No.
1	上铁壳	QJ/XYT-11026~11029
2	下铁壳	QJ/XYT-11034~11037
3	100F前塑料件	QJ/XYT-11010~11017
4	100F后塑料件	QJ/XYT-11018~11025
5	101F端子	QJ/XYT-11039

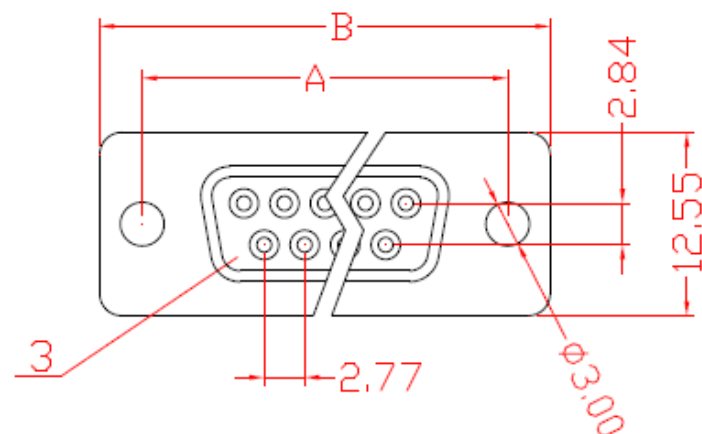

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55℃--+105℃
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B	C
9	24.99	30.81	19.36
15	33.32	39.20	27.64
25	47.04	53.10	41.08
37	63.50	69.50	57.38