

序号/RevNo.	名称/Title	文件编号/File No.
1	107F塑件主体	QJ/XYT-11097 ~ 11100
2	107塑件后盖	QJ/XYT-11101 ~ 11104
3	107F铁壳	QJ/XYT-11085 ~ 11088
4	DR螺丝	QJ/XYT-11084
5	107F端子(短)	QJ/XYT-11080
6	107F端子(长)	QJ/XYT-11081
7	107Z字片	QJ/XYT-11083

Specifications:

Contact Resistance: 30m Ω max.at DCdc 100 mA

Insulator Resistance: 1000M Ω min.at DC 500V

Current Rating: 5AMP


Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature:-55℃---+105℃

Contact: Phosphor bronze

Housing: PBT &30% Glass Fiber(UL 94V-0)

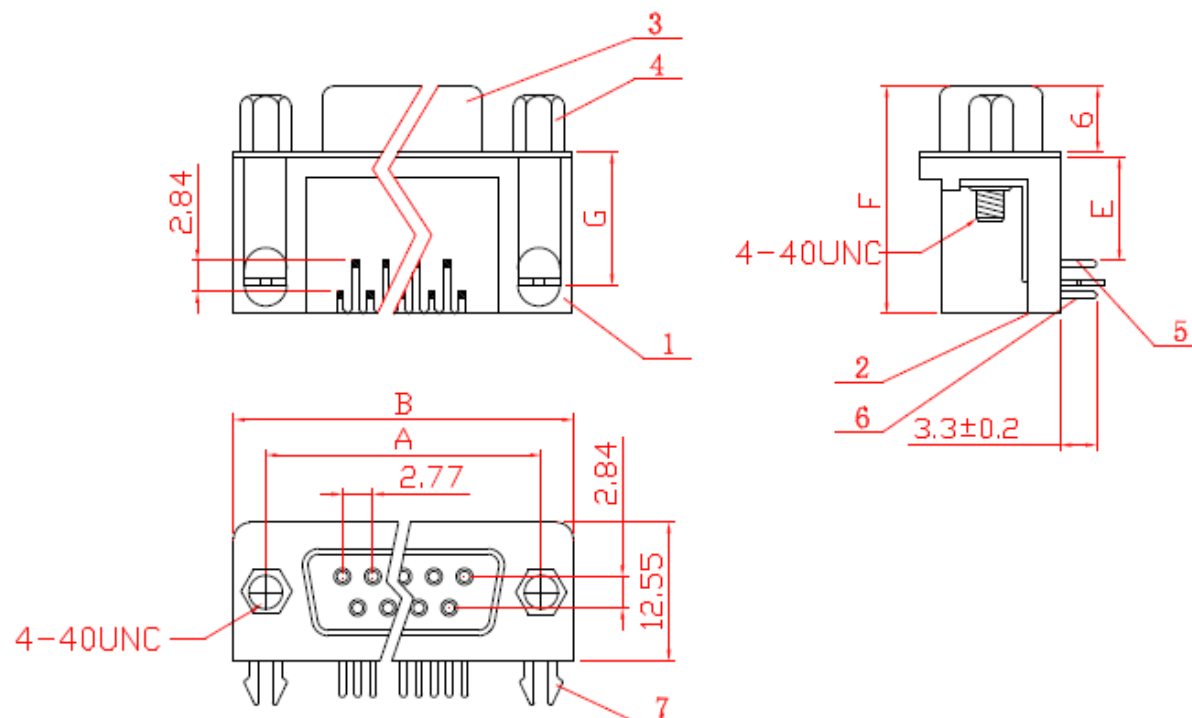

Position	A	B
9	24.99	31.04
15	33.32	39.24
25	47.04	53.04
37	63.50	69.62

E	F	G
7.2	18.4	9.62
9.4	20.64	12.06
13.84	25.3	16.5

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.				X. ±0.2	X.' ±2°
				.X ±0.1	.X' ±1°
				.XX ±0.05	.XX' ±0.5°
				.XXX ±0.01	
图名/Title 107F产品图				文件编号/File No. QJ/XYT-12014	
备注/Remark				页序/Sheet	
				单位/units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------