


序号/RevNo.	名称/Title	文件编号/File No.
1	上铁壳	QJ/XYT-11026~11029
2	下铁壳	QJ/XYT-11034~11037
3	100F前塑料件	QJ/XYT-11010~11017
4	100F后塑料件	QJ/XYT-11018~11025
5	100F端子	QJ/XYT-11003~11004

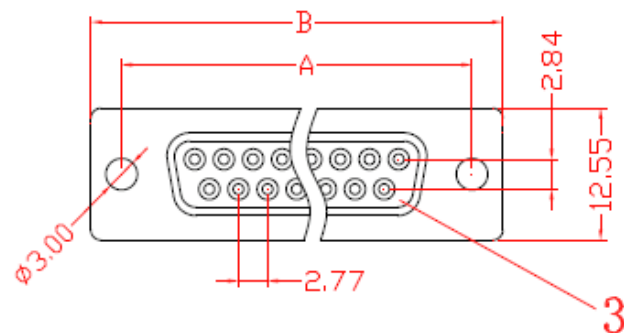


Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resisitance: 1000MΩ min.at DC 500V
 Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature:-55℃--+105℃
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

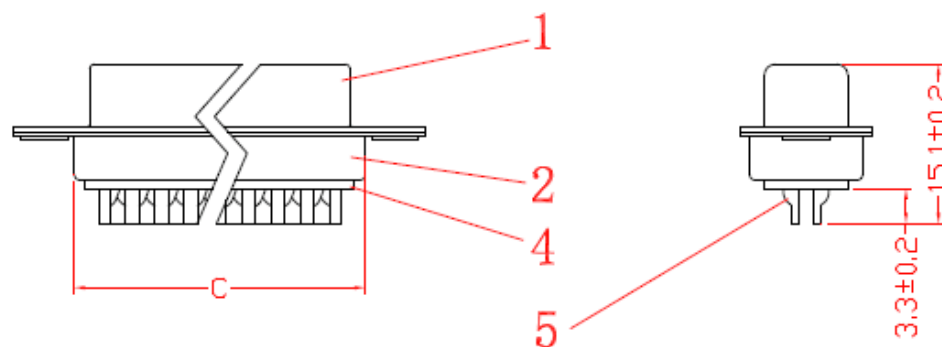

Position	A	B	C
9	24.99	30.81	19.36
15	33.32	39.20	27.64
25	47.04	53.10	41.08
37	63.50	69.50	57.38

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	x. =0.2	x." =2"
		100F产品图	QJ/XYT-12002	.x =0.1	.x" =1"
			页序/Sheet	.xx =0.05	.xx" =0.5"
备注 /Remark				.xxx =0.01	
				单位/units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------