

序号/RevNo.	名称/Title	文件编号/File No.
1	118-A塑料件	QJ/XYT-11132
2	118-A端子	QJ/XYT-11120

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP



Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature:-55℃--+105℃

Contact: Brass

Housing: PBT &30% Glass Fiber (UL 94V-0)

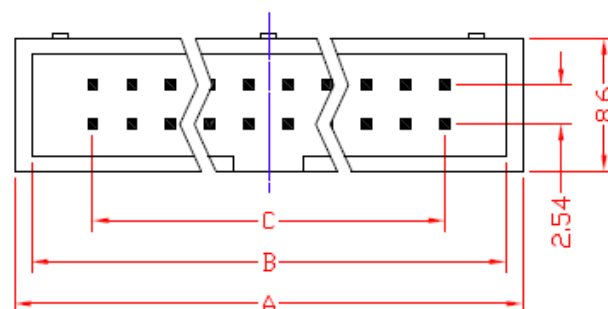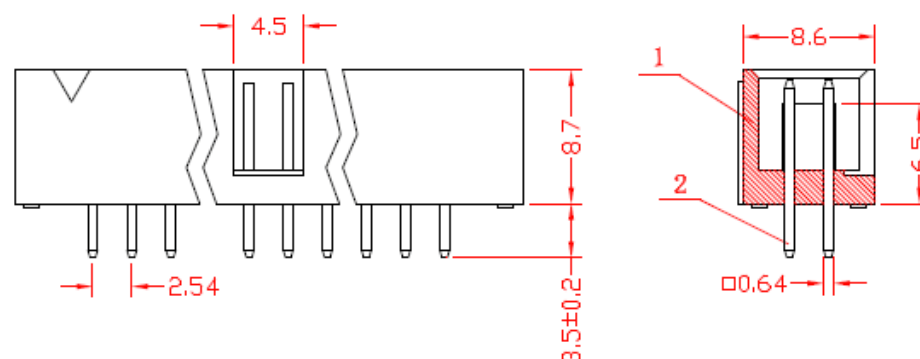

Position	A	B	C
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.78	48.58	40.64
40	58.40	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	88.88	86.68	78.74

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				X. ±0.2	X.* ±2*
				.X ±0.1	.X* ±1*
				.XX ±0.05	.XX* ±0.5*
				.XXX ±0.01	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.				图名/Title	文件编号/File No.
				118-A直针	QJ/XYT-12046
				页序/Sheet	
				备注/Remark	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------