
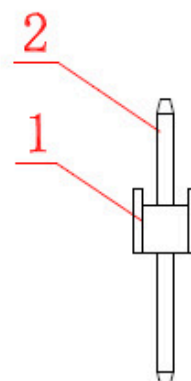
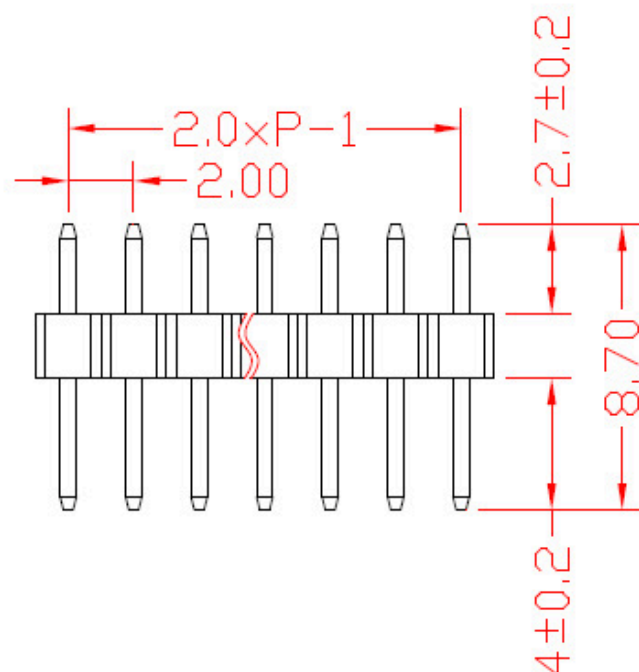


序号/Rev.No.	名称/Title	文件编号/File No.
1	塑料件	QJ/XYT-11121
2	端子	QJ/XYT-11123

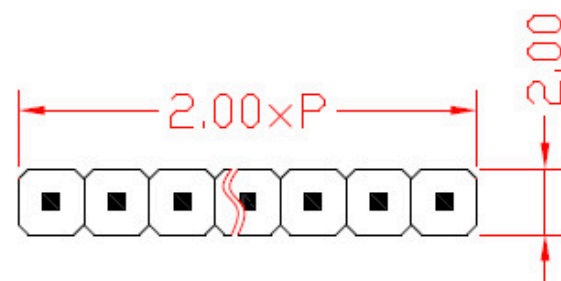

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature:-55°C--+105°C

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排针成一直线，相邻针之间相互平行。