
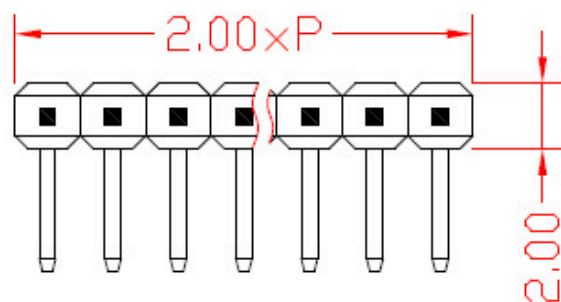
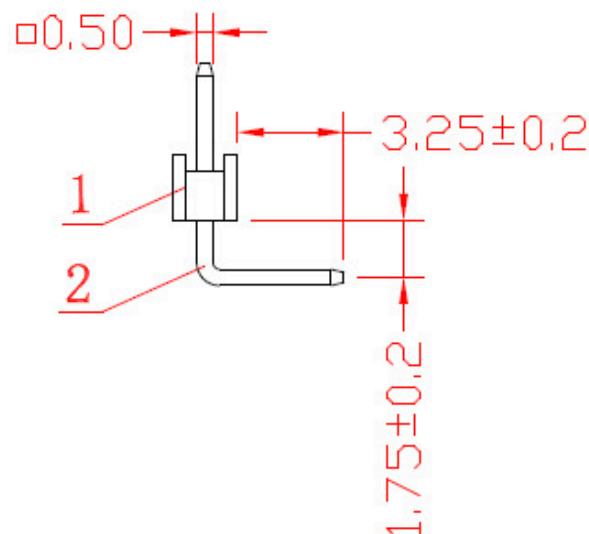


序号/revNo.	名称/Title	文件编号/File No.
1	塑料件	QJ/XYT-11121
2	端子	QJ/XYT-11123

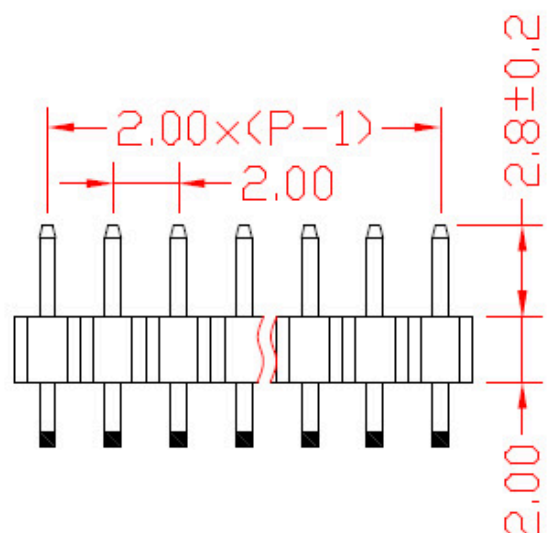

Specifications:

Contact Resistance: 30mΩ max.

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -55°C--+105°C

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	备注/Remark	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	页序/Sheet	
		113单排弯针	QJ/XYT-12033		
		备注/Remark		单位/units: mm	