
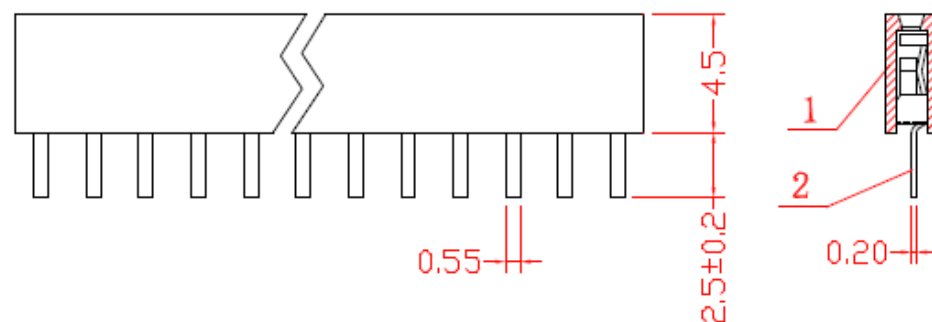


序号/RevNo.	名称/Title	文件编号/File No.
1	塑料件	QJ/XYT-11129
2	端子	QJ/XYT-11131

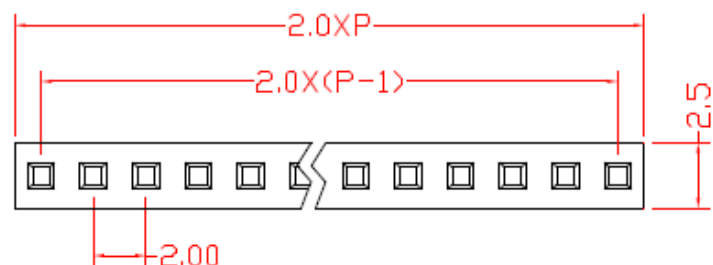

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
Operating Temperature:-55°C--+105°C
Contact: Phosphor bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无色斑、裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.	115-A单排产品图	图名/Title		文件编号/File No.	
				QJ/XYT-12039	
		页序/Sheet			
		备注/Remark		单位/units: mm	
				X. ±0.2	X.* ±2*
				.X ±0.1	.X* ±1*
				.XX ±0.05	.XX* ±0.5*
				.XXX ±0.01	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------