
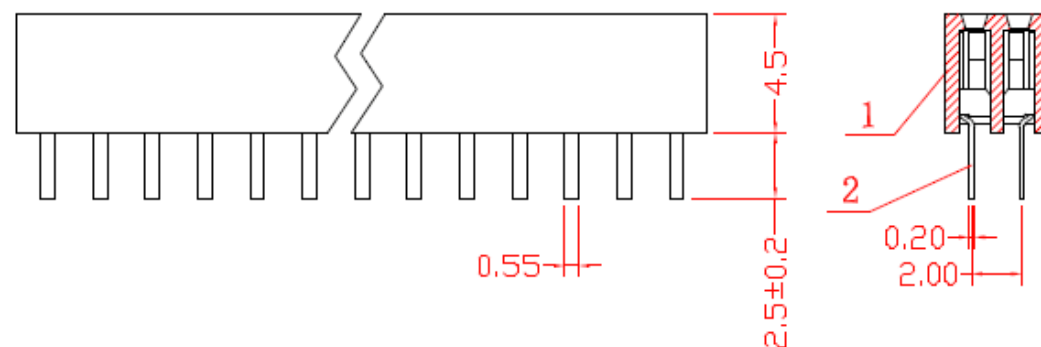


序号/RevNo.	名称/Title	文件编号/File No.
1	塑料件	QJ/XYT-11130
2	端子	QJ/XYT-11131

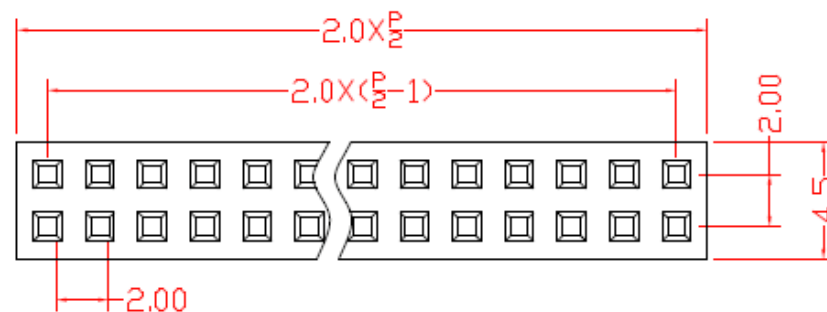

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
Operating Temperature:-55°C--+105°C
Contact: Phosphor bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

- 塑料件无色斑、裂痕。
- 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance		
 新亚联合科技 XINYA UNITED TECH CO.,LTD.	115-A双排产品图	图名/Title	文件编号/File No.	X. ±0.2	X." ±2"	
		115-A双排产品图	QJ/XYT-12040	页序/Sheet	.X ±0.1	.X" ±1"
					.XX ±0.05	.XX" ±0.5"
					.XXX ±0.01	
					备注/Remark	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------