
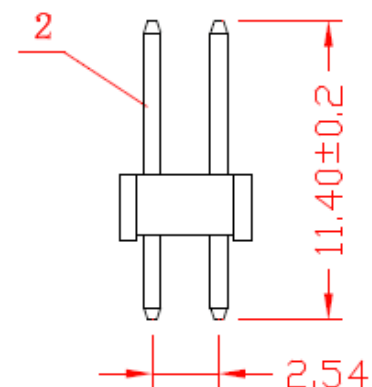
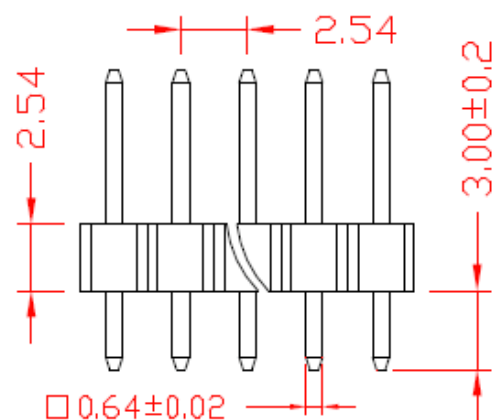


序号/RevNo.	名称/Title	文件编号/File No.
1	塑料件	QJ/XYT-11119
2	端子	QJ/XYT-11120

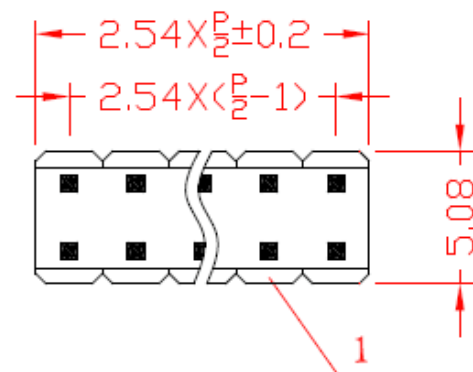

Specifications:

Contact Resistance: $30\text{m}\Omega$ max.at DC 100 mA
 Insulator Resistance: $1000\text{M}\Omega$ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55°C --- $+105^{\circ}\text{C}$
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

- 塑料件无裂痕。
- 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.				X. ±0.2	X.* ±2*
				.X ±0.1	.X* ±1*
				.XX ±0.05	.XX* ±0.5*
				.XXX ±0.01	
图名/Title 112-A双排直针 产品图				文件编号/File No. QJ/XYT-12022	
备注/Remark				页序/Sheet	
				单位/units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------