

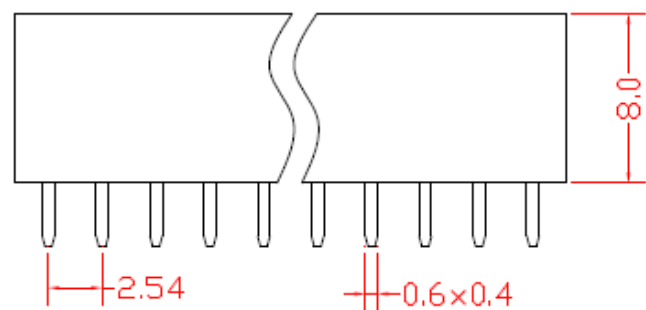


序号/RevNo.	名称/Title	文件编号/File No.
1	114单排塑料件	QJ/XYT-11124
2	114端子图(直)	QJ/XYT-11128

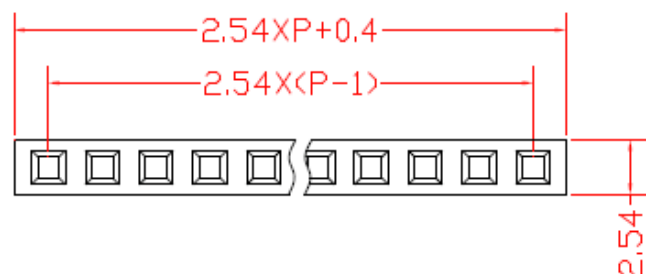

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature:-55°C--+105°C

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				X. ±0.2	X.' ±2'
				.X ±0.1	.X' ±1"
				.XX ±0.05	.XX' ±0.5"
				.XXX ±0.01	
				单位/Units: mm	

M&E 新亚联合科技
XINYA UNITED TECH CO.,LTD.

图名/Title 文件编号/File No.

114-A单排直针 产品图 QJ/XYT-12034

页序/Sheet

备注/Remark

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------