
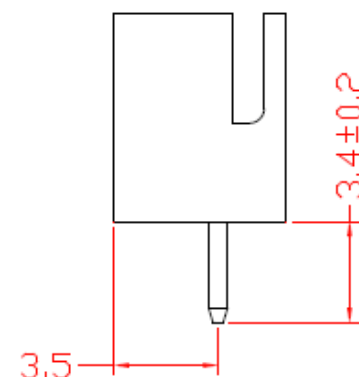


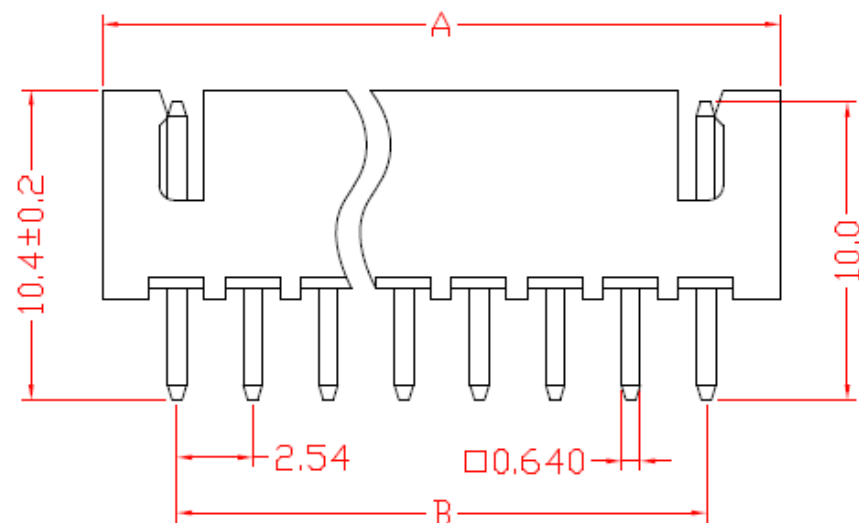

MATERIAL & FINISH


Insulator Material: Nylon 66 (UL 94V-0)

Contact Material: Brass

Contact Plated: Tin plated

Number of contacts: 2 Thru 13

Position	A	B
2	6.88	2.54
3	9.42	5.08
4	11.96	7.62
5	14.50	10.16
6	17.04	12.70
7	19.58	15.24
8	22.12	17.78
9	24.66	20.32
10	27.20	22.86
11	29.74	25.40
12	32.28	27.94
13	34.82	30.48
14	37.76	33.02
15	39.90	35.56
16	42.44	38.10
17	44.98	40.64
18	47.52	43.18
19	50.06	45.72
20	52.60	48.26

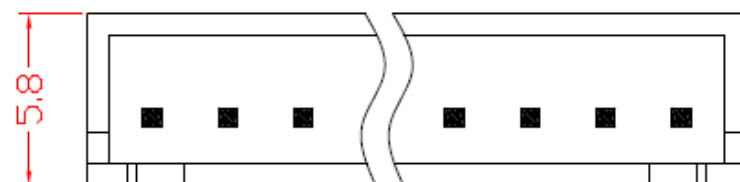

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2°
				.x ±0.1	.x' ±1°
				.xx ±0.05	.xx' ±0.5°
				.xxx ±0.01	
				单位/units: mm	



新亚联合科技
XINYA UNITED TECH CO., LTD.

图名/Title
136M直针产品图

文件编号/File No.
QJ/XYT-12081

页序/Sheet

备注/Remark

单位/units: mm