


MATERIAL & FINISH

Insulator Material: Nylon 66 (UL 94V-0)


Contact Material: Brass

Contact Plated: Tin plated

Number of contacts: 2 Thru 13

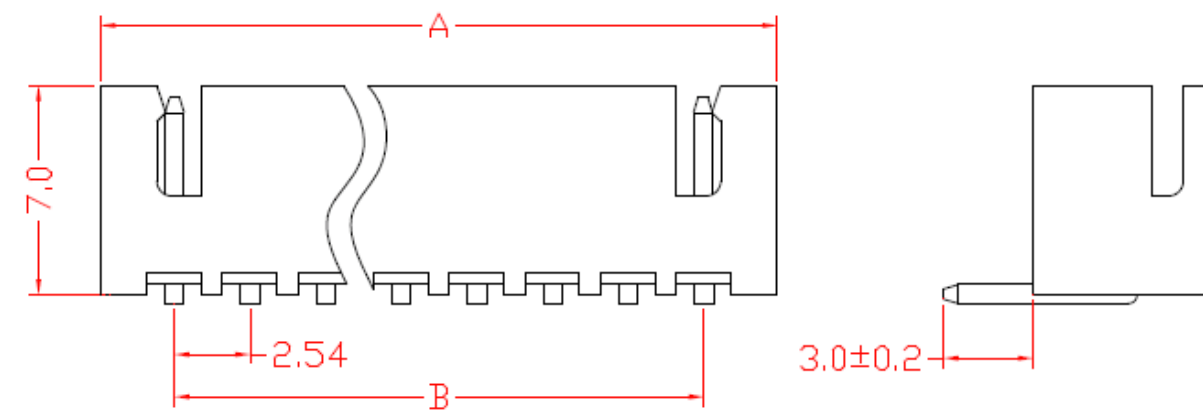

Position	A	B
2	6.88	2.54
3	9.42	5.08
4	11.96	7.62
5	14.50	10.16
6	17.04	12.70
7	19.58	15.24
8	22.12	17.78
9	24.66	20.32
10	27.20	22.86
11	29.74	25.40
12	32.28	27.94
13	34.82	30.48
14	37.76	33.02
15	39.90	35.56
16	42.44	38.10
17	44.98	40.64
18	47.52	43.18
19	50.06	45.72
20	52.60	48.26

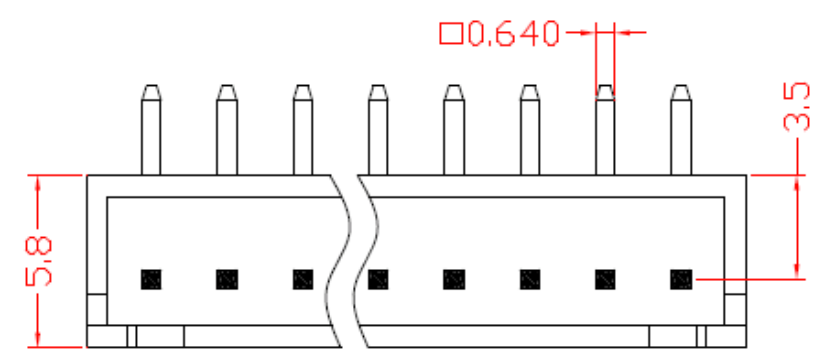

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				X. ±0.2	X. ±2°
				.X ±0.1	.X ±1°
				.XX ±0.05	.XX ±0.5°
				.XXX ±0.01	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.		
		136M弯针产品图	QJ/XYT-12082		
		备注/Remark	页序/Sheet	单位/units: mm	