


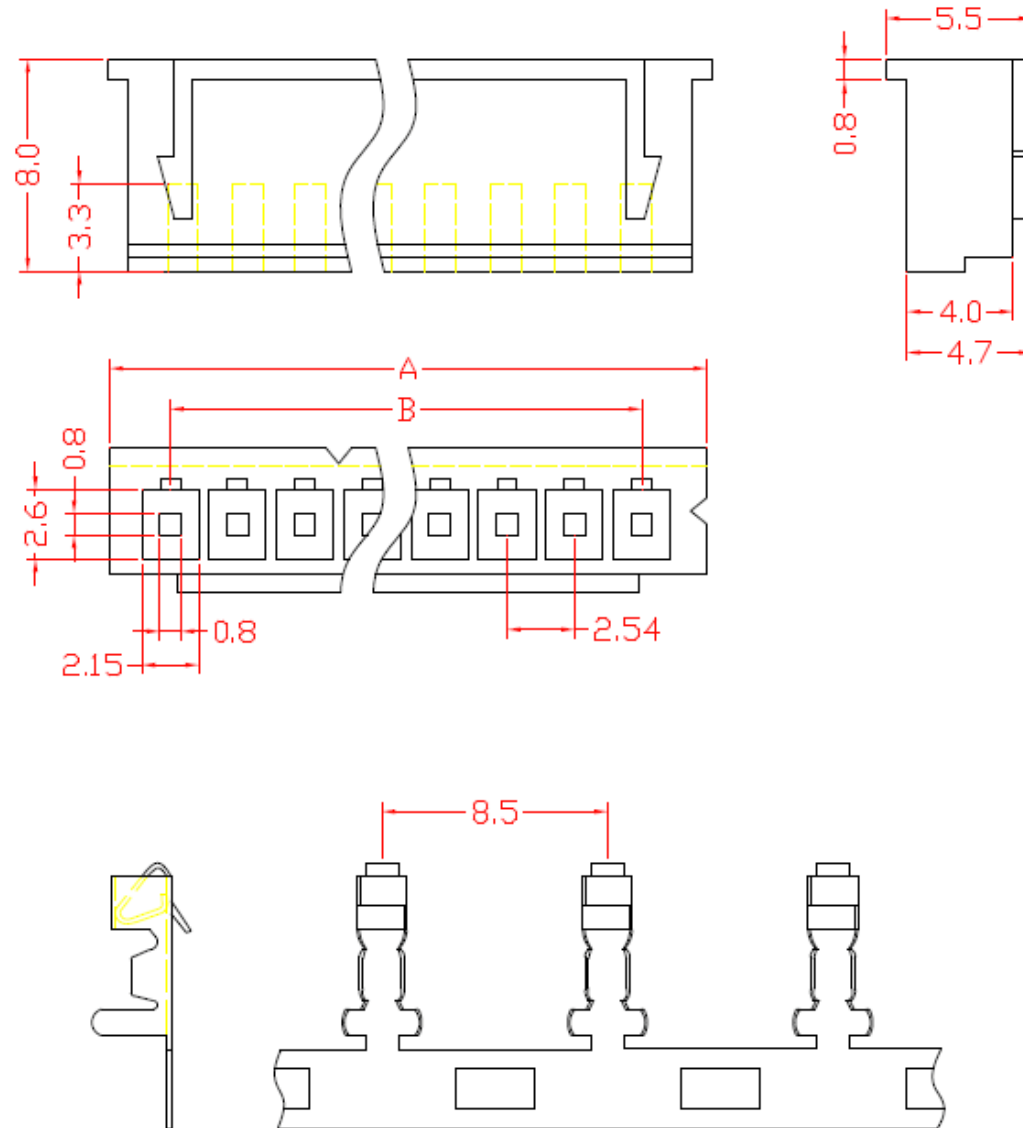

MATERIAL & FINISH

Insulator Material: Nylon 66 (UL 94V-0)

Contact Material: Brass

Contact Plated: Tin plated

Number of contacts: 2 Thru 13

Position	A	B
2	7.28	2.54
3	9.82	5.08
4	12.36	7.62
5	14.90	10.16
6	17.44	12.70
7	19.98	15.24
8	22.52	17.78
9	25.06	20.32
10	27.60	22.86
11	30.14	25.40
12	32.68	27.94
13	35.22	30.48
14	37.76	33.02
15	40.30	35.56
16	42.84	38.10
17	45.38	40.64
18	47.92	43.18
19	50.46	45.72
20	53.00	48.26

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				X. ±0.2	X. ±2°
				.X ±0.1	.X ±1°
				.XX ±0.05	.XX ±0.5°
				.XXX ±0.01	
 新亚联合科技 XINYA UNITED TECH CO., LTD.		图名/Title	文件编号/File No.		
		136F产品图	QJ/XYT-12083		
		备注/Remark	页序/Sheet		
				单位/units: mm	