

Specifications:

Contact Resistance: 15mΩ max

Insulator Resistance: 1000MΩ min





Dielectric Strength: AC 1500V For 1 minute Rated

Current : 5AMP

Material:

Housing: Nylon UL94V-2

Contact: Phosphor Bronze(Tin Plated)

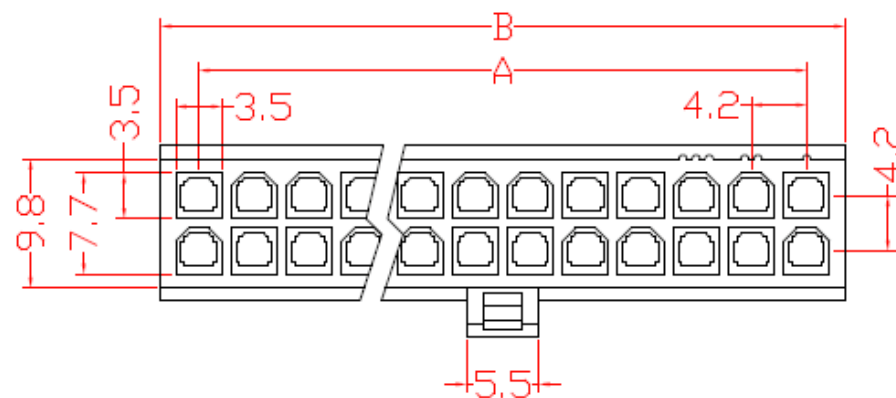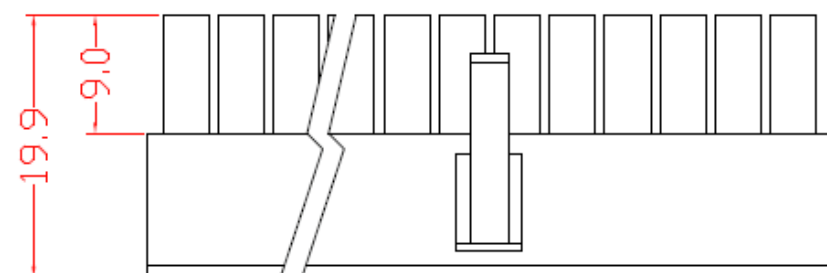

Position	A	B
2	4.2	5.6
3	8.4	14.0
4	4.2	9.8
5	16.8	22.4
6	8.4	14.0
8	12.6	18.2
10	16.8	22.4
12	21.0	26.6
14	25.2	30.8
16	29.4	35.0
18	33.6	39.2
20	37.8	43.4
22	42.0	47.6
24	46.2	51.8

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.	140F产品图	图名/Title	文件编号/File No.	X. ±0.2	X.* ±2*
		140F产品图	QJ/XYT-12093	.X ±0.1	.X* ±1*
				.XX ±0.05	.XX* ±0.5*
				.XXX ±0.01	
				备注 /Remark	
				单位/Units: mm	