


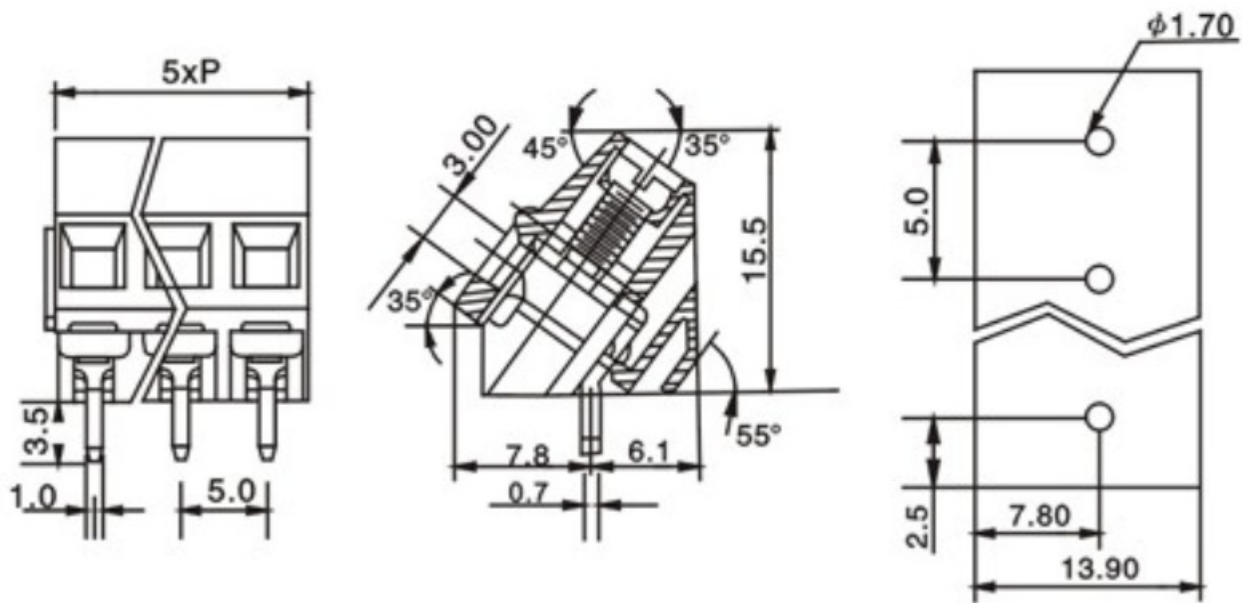

JK103-500-03

Specifications

Number Of Pins	3	Application	Cable connection
Allowable Current(A)	10	Allowable Voltage(V)	300
Wire connection method	Screw Fixing	Connection direction	Straight
Color	Drawing	Insulation resistance	5000M/1000V
Withstand Voltage	AC1500V/1Min	Wire specification(AWG)	24-12(2.5mm ²)
Allowable Ambient Temperature Range(°C)	-40~+105	Screw material	M2.5
Contact Point Material	Brass	Head Material	Brass, Tin plated
Housing	PA66, UL94V-0	Contact Resistance(mΩ)	20
Maximum welding temperature	+250→for 5 Sec.	Torque	0.4Nm(3.6lb.in)
Sheath	6-7mm	-	-