

Material

Housing : PA66 UL94V-0

Terminal:Brass , 0.8t , Tin-Plated

Screw : Steel , M4 , Ni-Plated

Capability

Rated : 300V/25A


Temp. Range : -40℃/+105℃

Withstand Voltage : AC2000V/Min


Insulation Resistance : 500mΩ/DC500V

Wire Range : 22-12AWG

Max. Torque Value : 8kg/cm

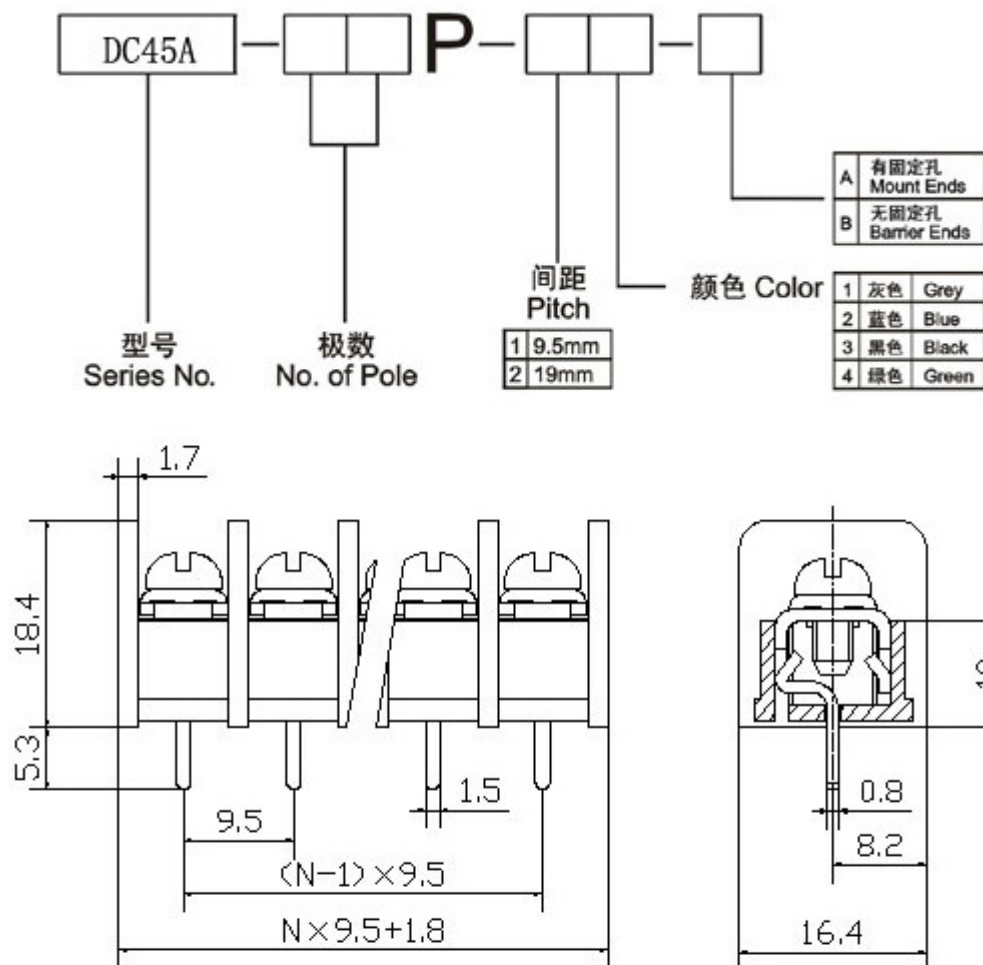

N=Number of contacts

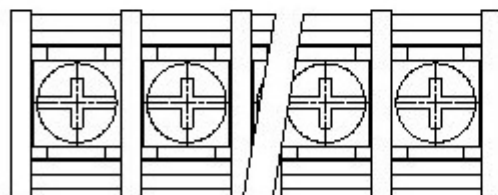

Pitch:9.5mm