





DIN Rail terminal blocks / DK series

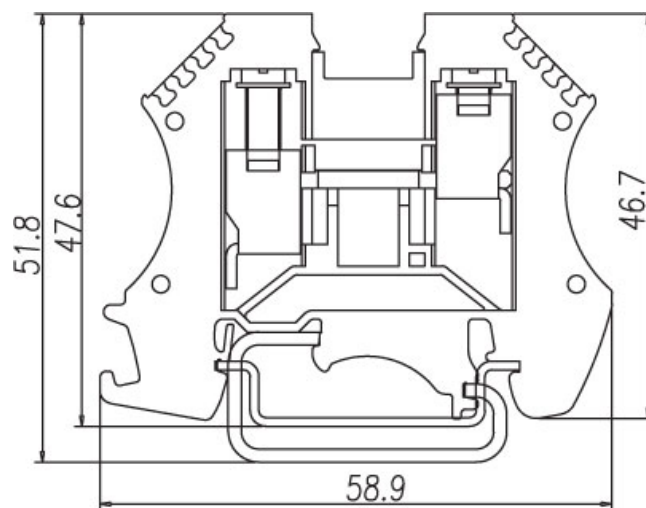

DK10

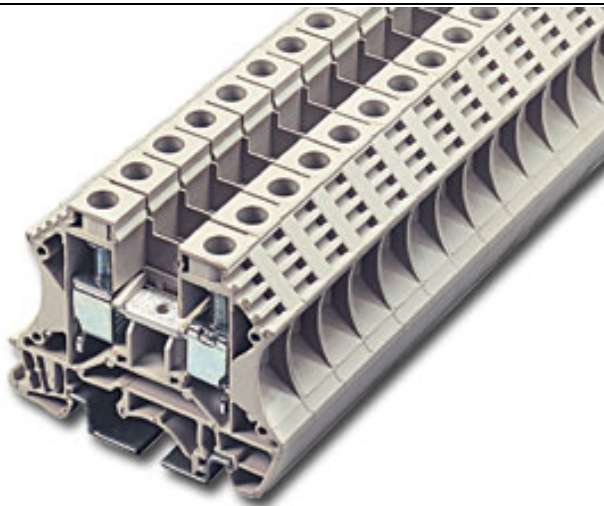

Approval	 	
Technical Data	UL	IEC
Rated voltage	600	500
Rated current	60A	57A
Conductor cross-section, solid (AWG / mm ²)	20~6 / 0.5~10	
Conductor cross-section, flexible (AWG / mm ²)	20~6 / 0.5~10	
Rated impulse withstand voltage	8KV	
Torque (N-m)	1.8	
Screw	M4	
Wire strip length	12~14mm	
Insulating material	PA	
TxHxW (mm)	10 x 47.6 x 58.9	
Optional color	Cat. No.	
	DK10-RD	
	DK10-BL	
	DK10-BK	
	DK10-OR	



	Accessories	Cat. No.
End cover		DK2.5C
Partition		DKSPS-002
Small partition		DKSPS-001
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-1002
	3 way	CSC-1003
	4 way	CSC-1004
	10 way	CSC-1010
Screw-on bridge	2 way	DS10-02P
	3 way	DS10-03P
	4 way	DS10-04P
	10 way	DS10-10P
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		0.8 x 4mm