



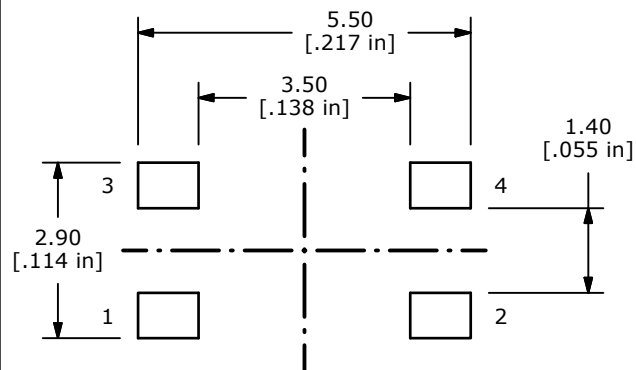





PCB LAYOUT



▲ CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
 $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
2. TERMINAL NUMBERS FOR REF. ONLY
3. CONTACT MATERIAL: SILVER
4. CONTACT RATING: 50 mA; 12 VDC
5. TRAVEL: 0.2 ± 0.1 mm
- ▲ 6. OPERATING FORCE: 180 ± 50 GRAMS
7. ELECTRICAL LIFE: 100,000 CYCLES
8. CONTACT RESISTANCE: $100\text{m}\Omega$ MAX.
9. ▲ DENOTES CRITICAL PARAMETER
10. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN @ 100VDC.
11. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE WITH NO BREAK DOWN
12. 2002/95/EC (ROHS) COMPLIANT; HALOGEN FREE

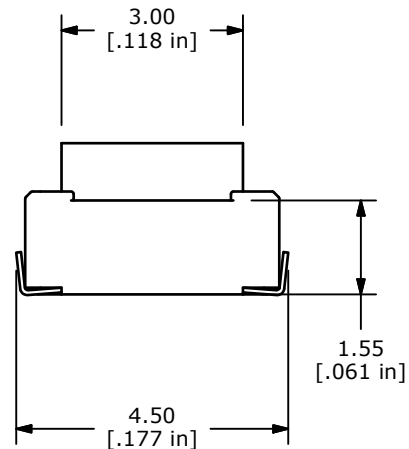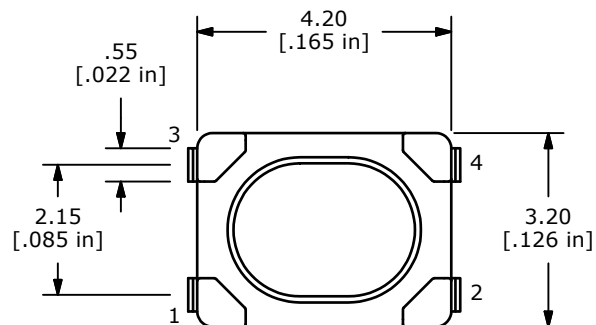

TITLE TL3365AF180QG

A	22163	New Release	2/17/16	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE
8:1DATE
2/15/2016DR
rcDWG
P003110REV
A